



中国认可  
国际互认  
检测  
TESTING  
CNAS L14701

# TEST REPORT


**Applicant:** Apex Solar Energy Technology GmbH

**Address:** Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany

**EUT Name:** Hybrid inverter

**Mode Name Under Test:** APEX-E-P3-12KL

**Model Name:** APEX-E-P3-5KL, APEX-E-P3-6KL, APEX-E-P3-8KL, APEX-E-P3-10KL, APEX-E-P3-12KL

**Brand Name:** 

**Test Standard:** EN IEC 61000-6-1:2019, EN IEC 61000-6-2:2019, EN 61000-6-3:2007+A1:2011+AC:2012, EN IEC 61000-6-4:2019, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN IEC 61000-3-11:2019, EN 61000-3-12:2011

**Date of receipt of test item:** Jun. 20, 2021


**Test Date:** Jun. 20, 2021 ~ Jul. 06, 2021

**Date of Issue:** Dec. 31, 2022

## ISSUED BY:

Dongguan BALUN Testing Technology Co., Ltd.

**Tested by:** Yongqing Chen



**Checked by:** Tao Zheng



**Approved by:** Simon Qi





### Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Dec. 31, 2022</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1. GENERAL INFORMATION .....	4
1.1. Test Laboratory .....	4
1.2. Test Location .....	4
2. PRODUCT INFORMATION .....	5
2.1. Applicant Information .....	5
2.2. Manufacturer Information .....	5
2.3. Factory Information .....	5
2.4. General Description for Equipment under Test (EUT) .....	5
2.5. Ancillary Equipment .....	8
2.6. Technical Information .....	8
3. SUMMARY OF TEST RESULTS .....	10
3.1. Test Standards .....	10
3.2. Verdict .....	11
3.3. Test Uncertainty .....	12
4. GENERAL TEST CONFIGURATIONS .....	13
4.1. Test Environments .....	13
4.2. Test Equipment List .....	13
4.3. Test Enclosure list .....	15
4.4. Test Configurations .....	15
4.5. Description of Test Setup .....	16
4.6. Test Conditions .....	20
5. TEST ITEMS .....	21
5.1. Emission Tests .....	21
5.2. Immunity Tests .....	31
ANNEX A TEST RESULTS .....	39

A.1 Radiated Emission .....	39
A.2 Conducted Emission .....	41
A.4 Voltage Fluctuations & Flicker .....	51
A.5 Electrostatic Discharge Immunity .....	52
A.6 Radio Frequency Electromagnetic Field Immunity .....	52
A.7 Electrical Fast Transient/Burst Immunity .....	53
A.8 Surge Immunity .....	53
A.9 Immunity to Conducted Disturbances Induced by RF Fields .....	54
A.10 Power Frequency Magnetic Fields Immunity .....	54
A.11 Voltage Dips and Short Interruptions Immunity .....	54
ANNEX B TEST SETUP PHOTOS .....	55
B.1 Radiated Emission .....	55
B.2 Conducted Emission .....	56
B.3 Harmonic Current Emissions .....	56
B.4 Voltage Fluctuations & Flicker .....	57
B.5 Electrostatic Discharge Immunity .....	57
B.6 Radio Frequency Electromagnetic Field Immunity .....	58
B.7 Electrical Fast Transient/Burst Immunity .....	59
B.8 Surge Immunity .....	60
B.9 Immunity to Conducted Disturbances Induced by RF Fields .....	61
B.10 Power Frequency Magnetic Fields Immunity .....	62
B.11 Voltage Dips and Short Interruptions Immunity .....	63
ANNEX C EUT EXTERNAL PHOTOS .....	64
ANNEX D EUT INTERNAL PHOTOS .....	67

## 1. GENERAL INFORMATION

### 1.1. Test Laboratory

Name	Dongguan BALUN Testing Technology Co., Ltd.
Address	Room 104, 204, 205, Building 1, No. 6, Industrial South Road, Songshan Lake District, Dongguan, Guangdong Province, P. R. China 523808

### 1.2. Test Location

Name	Dongguan BALUN Testing Technology Co., Ltd.
Location	Room 104, 204, 205, Building 1, No. 6, Industrial South Road, Songshan Lake District, Dongguan, Guangdong Province, P. R. China 523808



## 2. PRODUCT INFORMATION

### 2.1. Applicant Information

Applicant	Apex Solar Energy Technology GmbH
Address	Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany

### 2.2. Manufacturer Information

Manufacturer	Apex Solar Energy Technology GmbH
Address	Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany

### 2.3. Factory Information

Factory	NingBo Deye Inverter Technology Co., Ltd.
Address	No.26 South YongJiang Road, Daqi, Beilun, NingBo, China.

### 2.4. General Description for Equipment under Test (EUT)

EUT Name	Hybrid inverter
Mode Name Under Test	APEX-E-P3-12KL
Series Model Name	APEX-E-P3-5KL, APEX-E-P3-6KL, APEX-E-P3-8KL, APEX-E-P3-10KL, APEX-E-P3-12KL
Description of Model name differentiation	The variants models have the same appearance, topology, PCB board and software. The number of MPPT will be differentiated according to different power levels. The output power and input power are different which controlled by software. Please refer to the parameter table for specific differences.
Hardware Version	Ver 1.2
Software Version	Main: Ver 2002-1023-1707 HMI: Ver 1001-c00d

## Parameter tables:

Model	APEX-E-P3-6KL	APEX-E-P3-8KL	APEX-E-P3-10KL	APEX-E-P3-12KL
PV input parameters:				
Max. PV input Power [W]	7800	10400	13000	15600
MPP Voltage Range [Vd.c.]	200-650			
Start-up Voltage [Vd.c.]	160			
Max. PV Input Current [Ad.c.]	13+13	13+13	26+13	26+13
Max.DC Short-circuit current [Ad.c.]	17+17	17+17	34+17	34+17
Battery parameters:				
Battery Type	Lead-acid or Li-Ion			
Voltage range [Vd.c.]	40-60			
Max. Charge Current [Ad.c.]	150	190	210	240
Max. Discharge Current [Ad.c.]	150	190	210	240
AC output (On-Grid) parameters:				
Rated Output Voltage [Va.c.]	380/400, 3L/N/PE			
Rated Output Frequency [Hz]	50/60			
Rated Output Power [W]	6000	8000	10000	12000
Max. Output Power [VA]	6600	8800	11000	13200
Max. Output Current [Aa.c.]	13.6/13.0	18.2/17.4	22.7/21.7	27.3/26.1
Power Factor cos ϕ [ λ ]	0.8 leading to 0.8 lagging			
AC output (Off-Grid) parameters:				
Rated Output Voltage [Va.c.]	230/400, 3L/N/PE			
Rated Output Frequency [Hz]	50/60			
Rated Output Power [W]	6000	8000	10000	12000
Rated Output Current [Aa.c.]	9.1/8.7	12.1/11.6	15.2/14.5	18.2/17.4
Others:				
Protective class	Class I			
Inverter topology	Non-isolated			
Operation temperature range	-40~60℃ (>45℃ derating)			
Ingress protection	IP65			
Overvoltage category	DC II, AC III			

Model	APEX-E-P3-5KL
PV input parameters:	
Max. PV input Power [W]	6500
MPP Voltage Range [Vd.c.]	200-625
Start-up Voltage [Vd.c.]	160
Max. PV Input Current [Ad.c.]	13+13
Max.DC Short-circuit current [Ad.c.]	17+17
Battery parameters:	
Battery Type	Lead-acid or Li-Ion
Voltage range [Vd.c.]	40-60
Max. Charge Current [Ad.c.]	120
Max. Discharge Current [Ad.c.]	120
AC output (On-Grid) parameters:	
Rated Output Voltage [Va.c.]	380/400, 3L/N/PE
Rated Output Frequency [Hz]	50/60
Rated Output Power [W]	5000
Max. Output Power [VA]	5500
Max. Output Current [Aa.c.]	11.4/10.9
Power Factor $\cos \phi$ [ $\lambda$ ]	0.8 leading to 0.8 lagging
AC output (Off-Grid) parameters:	
Rated Output Voltage [Va.c.]	380/400, 3L/N/PE
Rated Output Frequency [Hz]	50/60
Rated Output Power [W]	5000
Rated Output Current [Aa.c.]	7.6/7.2
Others:	
Protective class	Class I
Inverter topology	Non-isolated
Operation temperature range	-40~60°C (>45°C derating)
Ingress protection	IP65
Overvoltage category	DC II, AC III

Difference table:

Model Component	APEX-E-P3-5KL, APEX-E-P3-6KL,	APEX-E-P3-8KL	APEX-E-P3-10KL	APEX-E-P3-12KL
No. of MPPT Trackers	2			
No. of Strings Per MPPT Tracker	1+1	1+1	2+1	2+1

## 2.5. Ancillary Equipment

Note: not applicable.

## 2.6. Technical Information

Interfaces present on the EUT	AC Ports	From mains to AC port.
	DC Ports	From power supply and battery to EUT.
	Telecom Port	No Telecom Ports.
	Signal Ports	RS-485, which cable length does not exceed 3m.
About the Product		The equipment is Hybrid inverter , the above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



## Labels:

Model No.: APEX-E-P3-5KL	
Product type	Hybrid inverter
Enclosure	IP65
Ambient Temperature	-40~60°C (>45°C derating)
Protection Level	Class I
Over Voltage Category	III (AC), II (DC)
Inverter topology	Non-isolated
Charge Mode	
Battery Voltage Range	48Vd.c.(40V-60V)
Battery Charge Current	120Ad.c.Max
AC Input Voltage	3LN/PE 230/400V.a.c.
AC Input Frequency	50/60Hz
AC Input Rated Current	7.2Aa.c.
Rated AC Input Power	8000W
PV Input Voltage	550V(160V~800V)
MPPT Input Range	200Vd.c.-650Vd.c.
PV Input Current	13Ad.c.+13Ad.c.
Max. PV Input Power	8000W
Max. PV I <sub>sc</sub>	17Ad.c.+17Ad.c.
Utility-Interactive	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	7.2Aa.c.
Max. AC output Current	8Aa.c.
AC Output Rated Power	8000W
Max. Apparent Power	8000VA
AC Output Power Factor	0.8 leading to 0.8 lagging
Max. AC I <sub>sc</sub>	75Aa.c.
Battery Discharge Voltage Range	40V-60Vd.c.
Battery Discharge Current	120Ad.c.Max
Battery Discharge Power	8000W
Stand Alone	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	7.2Aa.c.
Max. AC Output Current	10.5Aa.c.Max
Max. Apparent Power	5500VA
Max. Continuous AC Passthrough	45Aa.c.
Peak Output Power	10000W 10Seconds
Battery Discharge Voltage Range	40V-60Vd.c.
Max. Discharge Current	120Ad.c.Max
This Grid support interactive inverter complies with IEC/EN 62109-1, IEC/EN 62109-2	
<b>CAUTION:</b> - High voltage, warning electric shock! - The capacitors store hazardous energy. Do not touch the terminal or remove the shell within 5 minutes after all power is disconnected. - Keep the equipment well ventilated. - To avoid electric shock and warranty void, do not remove covers. - No operator serviceable component inside.	
Add: Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany	

Model No.: APEX-E-P3-6KL	
Product type	Hybrid inverter
Enclosure	IP65
Ambient Temperature	-40~60°C (>45°C derating)
Protection Level	Class I
Over Voltage Category	III (AC), II (DC)
Inverter topology	Non-isolated
Charge Mode	
Battery Voltage Range	48Vd.c.(40V-60V)
Battery Charge Current	150Ad.c.Max
AC Input Voltage	3LN/PE 230/400V.a.c.
AC Input Frequency	50/60Hz
AC Input Rated Current	8.7Aa.c.
Rated AC Input Power	8000W
PV Input Voltage	550V(160V~800V)
MPPT Input Range	200Vd.c.-650Vd.c.
PV Input Current	13Ad.c.+13Ad.c.
Max. PV Input Power	7800W
Max. PV I <sub>sc</sub>	17Ad.c.+17Ad.c.
Utility-Interactive	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	8.7Aa.c.
Max. AC output Current	9.6Aa.c.
AC Output Rated Power	8000W
Max. Apparent Power	8000VA
AC Output Power Factor	0.8 leading to 0.8 lagging
Max. AC I <sub>sc</sub>	75Aa.c.
Battery Discharge Voltage Range	40V-60Vd.c.
Battery Discharge Current	150Ad.c.Max
Battery Discharge Power	8000W
Stand Alone	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	8.7Aa.c.
Max. AC Output Current	12.8Aa.c.Max
Max. Apparent Power	6600VA
Max. Continuous AC Passthrough	45Aa.c.
Peak Output Power	12000W 10Seconds
Battery Discharge Voltage Range	40V-60Vd.c.
Max. Discharge Current	150Ad.c.Max
This Grid support interactive inverter complies with IEC/EN 62109-1, IEC/EN 62109-2	
<b>CAUTION:</b> - High voltage, warning electric shock! - The capacitors store hazardous energy. Do not touch the terminal or remove the shell within 5 minutes after all power is disconnected. - Keep the equipment well ventilated. - To avoid electric shock and warranty void, do not remove covers. - No operator serviceable component inside.	
Add: Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany	

Model No.: APEX-E-P3-8KL	
Product type	Hybrid inverter
Enclosure	IP65
Ambient Temperature	-40~60°C (>45°C derating)
Protection Level	Class I
Over Voltage Category	III (AC), II (DC)
Inverter topology	Non-isolated
Charge Mode	
Battery Voltage Range	48Vd.c.(40V-60V)
Battery Charge Current	150Ad.c.Max
AC Input Voltage	3LN/PE 230/400V.a.c.
AC Input Frequency	50/60Hz
AC Input Rated Current	11.6Aa.c.
Rated AC Input Power	8000W
PV Input Voltage	550V(160V~800V)
MPPT Input Range	200Vd.c.-650Vd.c.
PV Input Current	13Ad.c.+13Ad.c.
Max. PV Input Power	13000W
Max. PV I <sub>sc</sub>	17Ad.c.+17Ad.c.
Utility-Interactive	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	11.6Aa.c.
Max. AC output Current	12.8Aa.c.
AC Output Rated Power	8000W
Max. Apparent Power	8000VA
AC Output Power Factor	0.8 leading to 0.8 lagging
Max. AC I <sub>sc</sub>	75Aa.c.
Battery Discharge Voltage Range	40V-60Vd.c.
Battery Discharge Current	150Ad.c.Max
Battery Discharge Power	8000W
Stand Alone	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	11.6Aa.c.
Max. AC Output Current	17.4Aa.c.Max
Max. Apparent Power	8000VA
Max. Continuous AC Passthrough	45Aa.c.
Peak Output Power	16000W 10Seconds
Battery Discharge Voltage Range	40V-60Vd.c.
Max. Discharge Current	150Ad.c.Max
This Grid support interactive inverter complies with IEC/EN 62109-1, IEC/EN 62109-2	
<b>CAUTION:</b> - High voltage, warning electric shock! - The capacitors store hazardous energy. Do not touch the terminal or remove the shell within 5 minutes after all power is disconnected. - Keep the equipment well ventilated. - To avoid electric shock and warranty void, do not remove covers. - No operator serviceable component inside.	
Add: Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany	

Model No.: APEX-E-P3-10KL	
Product type	Hybrid inverter
Enclosure	IP65
Ambient Temperature	-40~60°C (>45°C derating)
Protection Level	Class I
Over Voltage Category	III (AC), II (DC)
Inverter topology	Non-isolated
Charge Mode	
Battery Voltage Range	48Vd.c.(40V-60V)
Battery Charge Current	210Ad.c.Max
AC Input Voltage	3LN/PE 230/400V.a.c.
AC Input Frequency	50/60Hz
AC Input Rated Current	14.5Aa.c.
Rated AC Input Power	10000W
PV Input Voltage	550V(160V~800V)
MPPT Input Range	200Vd.c.-650Vd.c.
PV Input Current	26Ad.c.+13Ad.c.
Max. PV Input Power	13000W
Max. PV I <sub>sc</sub>	34Ad.c.+17Ad.c.
Utility-Interactive	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	14.5Aa.c.
Max. AC output Current	15.9Aa.c.
AC Output Rated Power	10000W
Max. Apparent Power	11000VA
AC Output Power Factor	0.8 leading to 0.8 lagging
Max. AC I <sub>sc</sub>	75Aa.c.
Battery Discharge Voltage Range	40V-60Vd.c.
Battery Discharge Current	210Ad.c.Max
Battery Discharge Power	10000W
Stand Alone	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	14.5Aa.c.
Max. AC Output Current	21.7Aa.c.Max
Max. Apparent Power	11000VA
Max. Continuous AC Passthrough	45Aa.c.
Peak Output Power	20000W 10Seconds
Battery Discharge Voltage Range	40V-60Vd.c.
Max. Discharge Current	210Ad.c.Max
This Grid support interactive inverter complies with IEC/EN 62109-1, IEC/EN 62109-2	
<b>CAUTION:</b> - High voltage, warning electric shock! - The capacitors store hazardous energy. Do not touch the terminal or remove the shell within 5 minutes after all power is disconnected. - Keep the equipment well ventilated. - To avoid electric shock and warranty void, do not remove covers. - No operator serviceable component inside.	
Add: Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany	

Model No.: APEX-E-P3-12KL	
Product type	Hybrid inverter
Enclosure	IP65
Ambient Temperature	-40~60°C (>45°C derating)
Protection Level	Class I
Over Voltage Category	III (AC), II (DC)
Inverter topology	Non-isolated
Charge Mode	
Battery Voltage Range	48Vd.c.(40V-60V)
Battery Charge Current	240Ad.c.Max
AC Input Voltage	3LN/PE 230/400V.a.c.
AC Input Frequency	50/60Hz
AC Input Rated Current	17.4Aa.c.
Rated AC Input Power	12000W
PV Input Voltage	550V(160V~800V)
MPPT Input Range	200Vd.c.-650Vd.c.
PV Input Current	26Ad.c.+13Ad.c.
Max. PV Input Power	15600W
Max. PV I <sub>sc</sub>	34Ad.c.+17Ad.c.
Utility-Interactive	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	17.4Aa.c.
Max. AC output Current	19.1Aa.c.
AC Output Rated Power	12000W
Max. Apparent Power	13200VA
AC Output Power Factor	0.8 leading to 0.8 lagging
Max. AC I <sub>sc</sub>	75Aa.c.
Battery Discharge Voltage Range	40V-60Vd.c.
Battery Discharge Current	240Ad.c.Max
Battery Discharge Power	12000W
Stand Alone	
AC Output Voltage	3LN/PE 230/400V.a.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	17.4Aa.c.
Max. AC Output Current	26.1Aa.c.Max
Max. Apparent Power	13200VA
Max. Continuous AC Passthrough	45Aa.c.
Peak Output Power	24000W 10Seconds
Battery Discharge Voltage Range	40V-60Vd.c.
Max. Discharge Current	240Ad.c.Max
This Grid support interactive inverter complies with IEC/EN 62109-1, IEC/EN 62109-2	
<b>CAUTION:</b> - High voltage, warning electric shock! - The capacitors store hazardous energy. Do not touch the terminal or remove the shell within 5 minutes after all power is disconnected. - Keep the equipment well ventilated. - To avoid electric shock and warranty void, do not remove covers. - No operator serviceable component inside.	
Add: Reisholzer Werftstr. 76, Düsseldorf, 40589 Germany	

### 3. SUMMARY OF TEST RESULTS

#### 3.1. Test Standards

No.	Identity	Document Title
1	EN IEC 61000-6-1:2019	Electromagnetic compatibility (EMC) -- Part 6-1: Generic standards - Immunity standard for residential, commercial and light-industrial environments
2	EN IEC 61000-6-2:2019	Electromagnetic compatibility (EMC) -- Part 6-2: Generic standards - Immunity standard for industrial environments
3	EN 61000-6-3:2007 +A1:2011+AC:2012	Electromagnetic compatibility (EMC) -- Part 6-3: Generic standards -- Emission standard for equipment in residential, commercial and light-industrial environments
4	EN IEC 61000-6-4:2019	Electromagnetic compatibility (EMC) -- Part 6-4: Generic standards -- Emission standard for industrial environments
5	EN IEC 61000-3-2:2019	Electromagnetic compatibility (EMC) -- Part 3-2: Limits-Limits for harmonic current emissions (equipment input current $\leq 16$ A per phase)
6	EN 61000-3-3:2013+A1:2019	Electromagnetic compatibility (EMC) -- Part 3-3: Limits-Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current 16 A per phase and not subject to conditional connection
7	EN IEC 61000-3-11:2019	Electromagnetic compatibility (EMC) - Part 3-11: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems - Equipment with rated current $\leq 75$ A and subject to conditional connection
8	EN 61000-3-12:2011	Electromagnetic compatibility (EMC) - Part 3-12: Limits - Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current $>16$ A and $\leq 75$ A per phase

### 3.2. Verdict

No.	Base Standard	Description		Test Verdict	Result	Remark
Emission						
1	EN 61000-6-3:2007 +A1:2011+AC:2012	Radiated Emission	Below 1 GHz	P	Annex A.1	Note 1
2	EN 61000-6-3:2007 +A1:2011+AC:2012	Conducted Emission	AC Ports	P	Annex A.2	--
			DC Ports	N		Note 2
			Telecom Ports	N		Note 3
3	EN IEC 61000-3-2:2019; EN 61000-3-12:2011	Harmonic Current Emissions		P	Annex A.3	--
4	EN 61000-3-3:2013 +A1:2019; EN IEC 61000-3-11:2019	Voltage Fluctuations & Flicker		P	Annex A.4	--
Immunity						
5	IEC 61000-4-2:2008	Electrostatic Discharge Immunity		P	Annex A.5	--
6	IEC 61000-4-3:2006 +A1:2007+A2:2010	Radiated RF Electromagnetic Field Immunity		P	Annex A.6	--
7	IEC 61000-4-4:2012	Electrical Fast Transient/Burst Immunity	AC Ports	P	Annex A.7	--
			DC Ports	P		--
			Signal Ports	N		Note 4
8	IEC 61000-4-5:2014	Surge Immunity	AC Ports	P	Annex A.8	--
			DC Ports	P		--
			Signal Ports	N		Note 5
9	IEC 61000-4-6:2013	Immunity to Conducted Disturbances Induced by RF Fields	AC Ports	P	Annex A.9	--
			DC Ports	P		--
			Signal Ports	N		Note 4
10	IEC 61000-4-8:2009	Power-frequency magnetic field		P	Annex A.10	--
11	IEC 61000-4-34:2005 +A1:2009	Voltage Dips and Short Interruptions Immunity	AC Ports	P	Annex A.11	--

Note 1: The highest frequency of the internal sources of the EUT is below 108 MHz, the measurement shall be made below 1 GHz.

Note 2: Applicable only to ports intended for connection to

- a local DC distribution network, or
- a remote battery by a connecting cable exceeding a length of 3m.

The EUT is a PV Solar Grid Tie Inverter, which does not intended for connection to a local DC distribution network or a remote battery.

Note 3: Telecommunications/network port is a point of connection for voice, data and signaling transfers intended to interconnect widely dispersed systems via such means as direct connection to multi-user telecommunications networks, local area networks and similar networks. A port generally intended for interconnection of components of an ITE system under test and used in accordance with its functional specifications, is not considered to be a telecommunication port. The EUT does not have telecommunication port according to above definition.

Note 4: Signal/control port is a port at which a conductor or cable intended to carry signals is connected to the equipment. Applicable only to ports interfacing with cables whose total length according to the manufacturer's functional specification may exceed 3 m. The signal ports cable length of EUT is less than 2m.

Note 5: Signal/control port is a port at which a conductor or cable intended to carry signals is connected to the equipment. Applicable only to ports interfacing with cables whose total length according to the manufacturer's functional specification may exceed 30 m. The signal ports cable length of EUT is less than 2m.

Note 6: The differences between this report and the report No.BL-DG2141023-404(G1) (Rev. 02), which was issued by Dongguan BALUN Testing Technology Co., Ltd. on Oct. 25, 2022 is that :

a: Change the applicant information, manufacturer information and series model.

b: Update the labels and EUT external photos.

The sample under test is the same. All test result please refer to report No.BL-DG2141023-404(G1) (Rev. 02), which was issued by Dongguan BALUN Testing Technology Co., Ltd. on Oct. 25, 2022.

This report judges the test conclusions:

——Not applicable for this test product	N
——Meet requirements	P
——Does not meet the requirements	F

### 3.3. Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (Mains port)	3.77 dB
Radiated emissions (30 MHz-1 GHz)	4.81 dB

## 4. GENERAL TEST CONFIGURATIONS

### 4.1. Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	20°C ~ 27°C	AC 400V 50Hz; MPPT 150V~800V; DC 48V	50% ~ 57%	100.0kPa ~ 101.0kPa

### 4.2. Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Keysight	N9038A	MY55330115	2021.03.02	2022.03.01
Test Antenna- Bi-Log	SCHWARZBECK	VULB 9163	9163-1202	2018.12.20	2021.12.19
Anechoic Chamber	YIHENG ELECTRONIC	12.0m*7.0m* 7.5m	N/A	2019.03.05	2022.03.04
Test Software	Balun	BL410-E (Version: V19.319)	N/A	N/A	N/A

Conducted Emission					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Keysight	N9038A	MY55330115	2021.03.02	2022.03.01
LISN	SCHWARZBECK	NNLK 8129	8129-462	2020.11.10	2021.11.09
Anechoic Chamber	YIHENG ELECTRONIC	12.0m*7.0m* 7.5m	N/A	2019.03.05	2022.03.04
Test Software	Balun	BL410-E (Version: V19.319)	N/A	N/A	N/A

Voltage Fluctuations & Flicker and Harmonic Current Emissions Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Analyzer	ZHIYUAN	PA6000H	PA6006H-PO 600-1456	2020.11.18	2021.11.17
Three-phase Flicker Impedance	HTEC	FI-75A	172101	2020.09.11	2021.09.10

Electrostatic Discharge Immunity Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
ESD Test System	SCHLODER	SESD 30000	607339	2021.03.16	2022.03.15

Radiated RF Electromagnetic Field Immunity Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Anechoic Chamber	YIHENG ELECTRONIC	12.0m*7.0m*7.5m	N/A	2019.03.05	2022.03.04
Signal Generator	ROHDE&SCHWARZ	N5181A	MY50141978	2021.03.18	2022.03.17
Power Amplifier	rflight	NTWPA-00810200E	18093198	2021.03.02	2022.03.01
Power Amplifier	rflight	NTWPA-1060100E	18093195	2021.03.02	2022.03.01
Power Meter	Agilent	E4417A	GB41292042	2021.03.02	2022.03.01
Feld Strength Meter	Narda	EP601	511WX51129	2021.03.16	2022.03.15
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-1202	2018.12.20	2021.12.19
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1986	2018.12.20	2021.12.19

Electrical Fast Transient/Burst Immunity Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EFT Test System	HTEC	HEFT 51	1331011	2021.03.02	2022.03.01
EFT coupling network	HTEC	ECDN 51	150601	2021.03.02	2022.03.01

Transients and Surges Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
SURGE Generator (AC/DC Ports)	HTEC	HCWG 70	151601	2021.03.18	2022.03.17
SURGE coupling network (AC/DC Ports)	HTEC	SCDN303P7	151602	2021.03.18	2022.03.17

Immunity to Conducted Disturbances Induced by RF Fields					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Conducted Disturbances Test System	Schloder GmbH	CDG 6000	18901932-0101	2020.09.21	2021.09.20
CDN-M2+3	Schloder GmbH	CDN M2+3-32	18901802-0110	2020.09.21	2021.09.20
CDN-M5	TESEQ	CDN-M5-100	A2560005/2016	2020.09.21	2021.09.20

Power Frequency Magnetic Fields Immunity					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Magnetic Field Tester	HEAFELY	HPFMF 1000	183102	2021.03.02	2022.03.01

Voltage Dips and Short Interruptions Immunity Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Voltage Fault Simulating Generator	HTEC	HPFS303P	152301	2021.03.02	2022.03.01
Voltage Fault Coupling Network	HTEC	HV3P30	152302	2021.03.02	2022.03.01

### 4.3. Test Enclosure list

Name	Manufacturer	Model	Serial No.	Length	Description
DC Source	WKDY	WLPA-150KW	W20180626011	N/A	N/A
DC Source	Chroma	Chroma 6215011-1000s	6215EF01558	N/A	N/A


### 4.4. Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>Grid-connected (100% Load)</u> <u>EUT+DC Source+AC Grid</u>
TC02	<u>Grid-connected &amp; Discharge (100% Load)</u> <u>EUT+DC Source+AC Grid</u>
TC03	<u>Grid-connected &amp; Charging (100% Load)</u> <u>EUT+DC Source+AC Grid</u>
TC04	<u>Discharge (100% Load)</u> <u>EUT+DC Source+AC Load</u>
TC05	<u>Standby</u> <u>EUT+AC Grid</u>




## 4.5. Description of Test Setup

### Test Setup 1 For Radiated Emission Test (30 MHz-1 GHz)

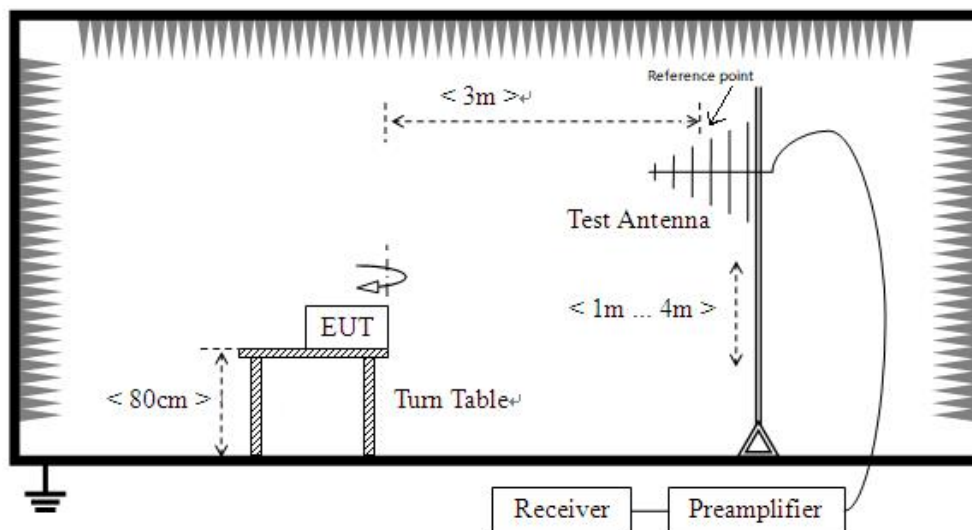


### Test Setup 2 For Conducted disturbance voltage at mains terminals Test

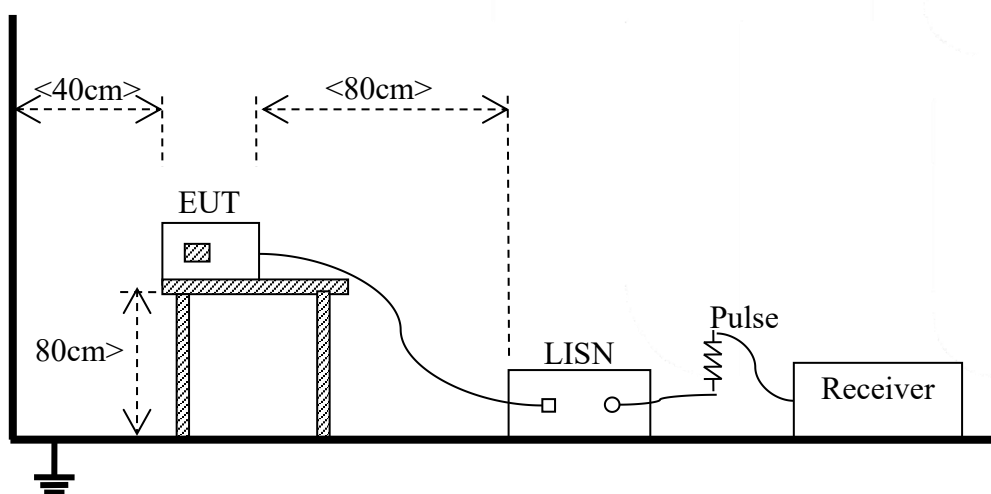





### Test Setup 3 For Harmonic Current Emissions Measurement Test



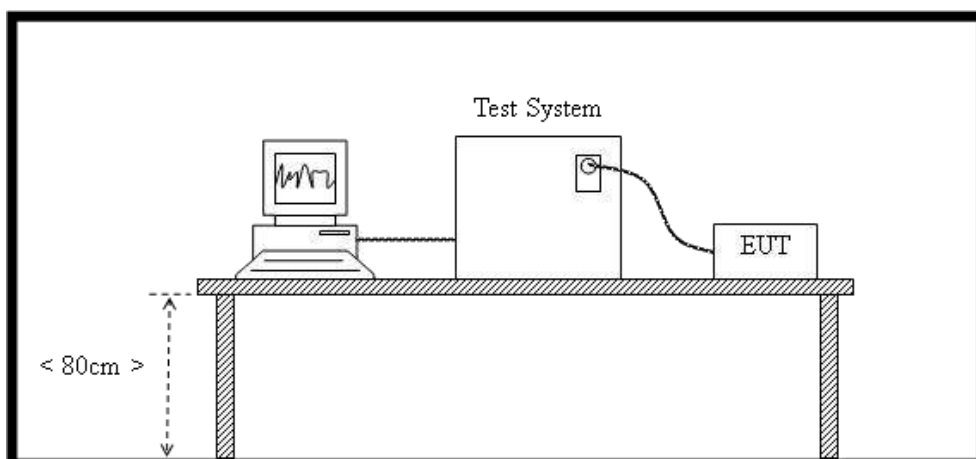


### Test Setup 4 For Voltage Fluctuations and Flicker Measurement Test

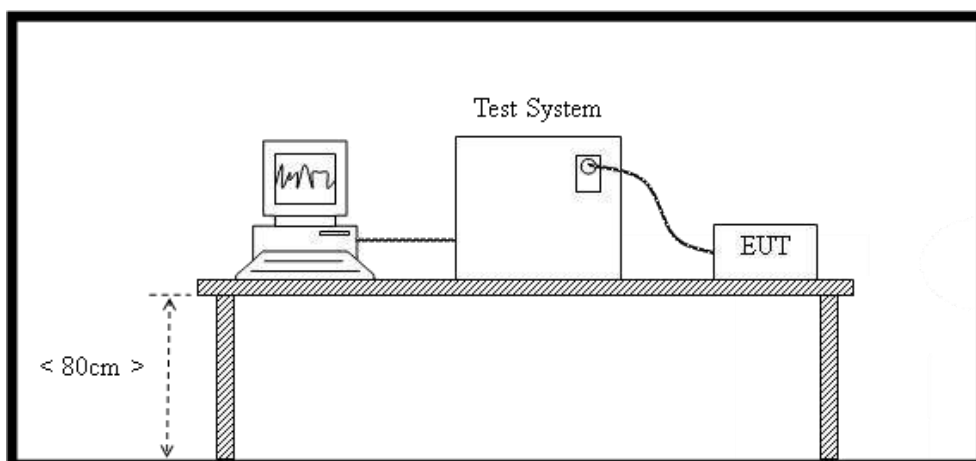


### Test Setup 5 For Electrostatic Discharge Immunity Test

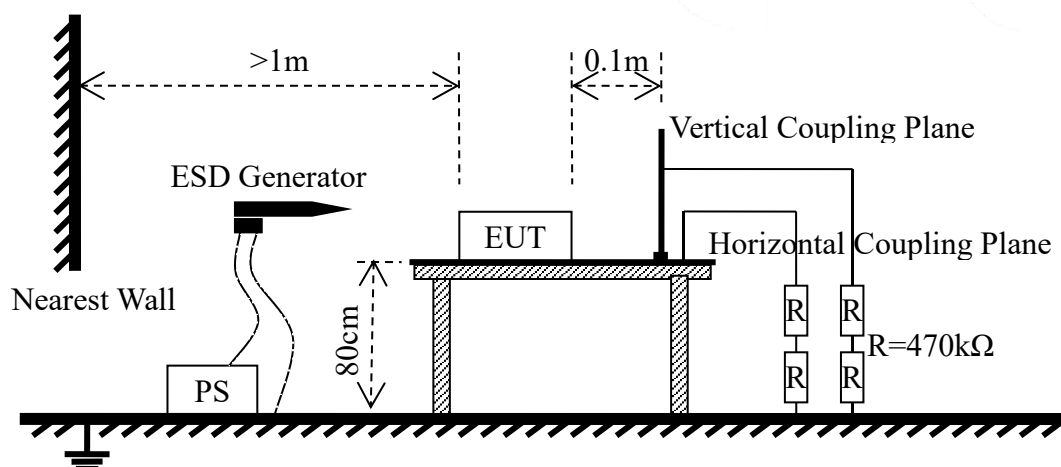


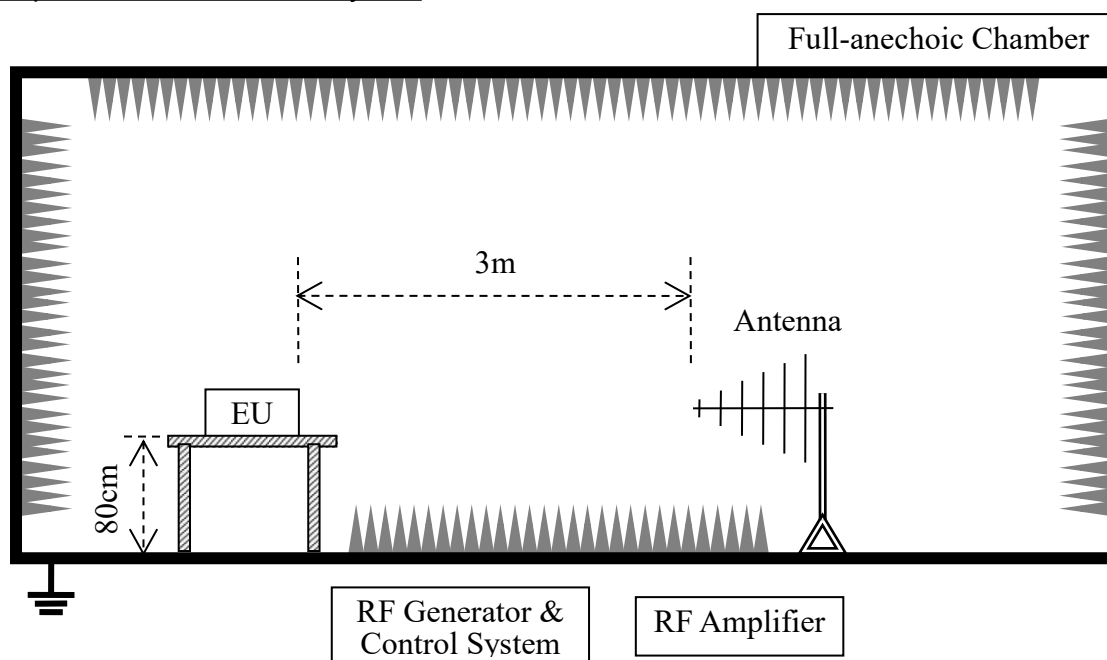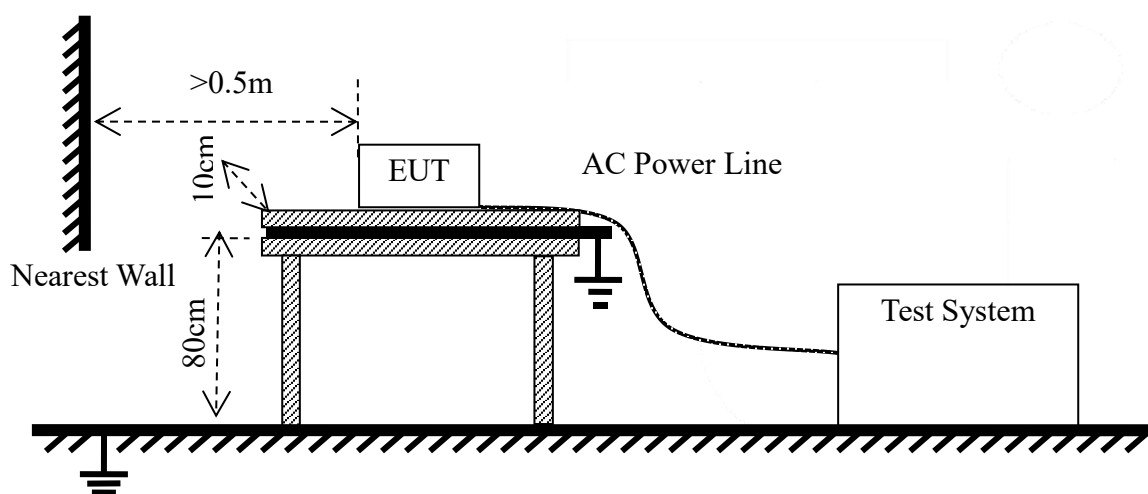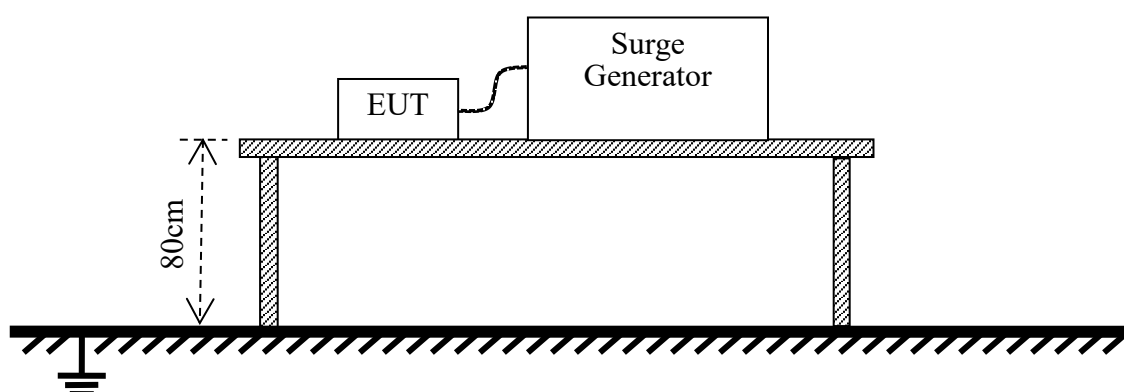Test Setup 6 For Radiated Immunity TestTest Setup 7 For Electrical Fast Transient / Burst Immunity TestTest Setup 8 For Surge Immunity Test


### Test Setup 9 For Immunity to Conducted Disturbances Induced By RF Fields Test

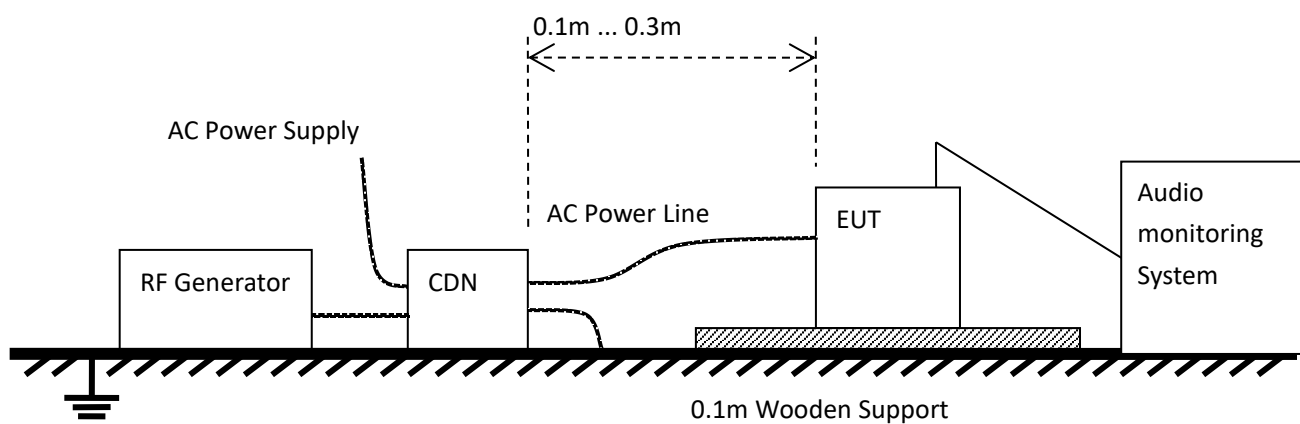

### Test Setup 10 Power Frequency Magnetic Fields

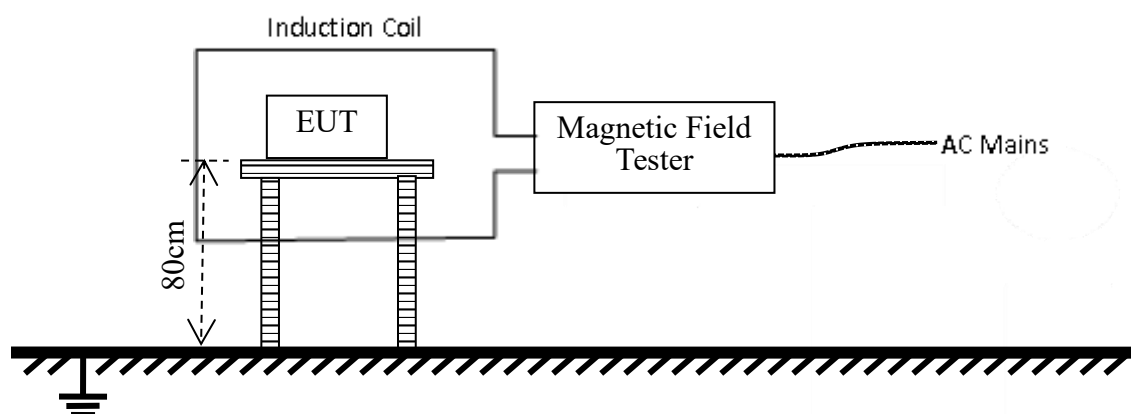

### Test Setup 11 For Voltage Dips and Short Interruptions Immunity Test

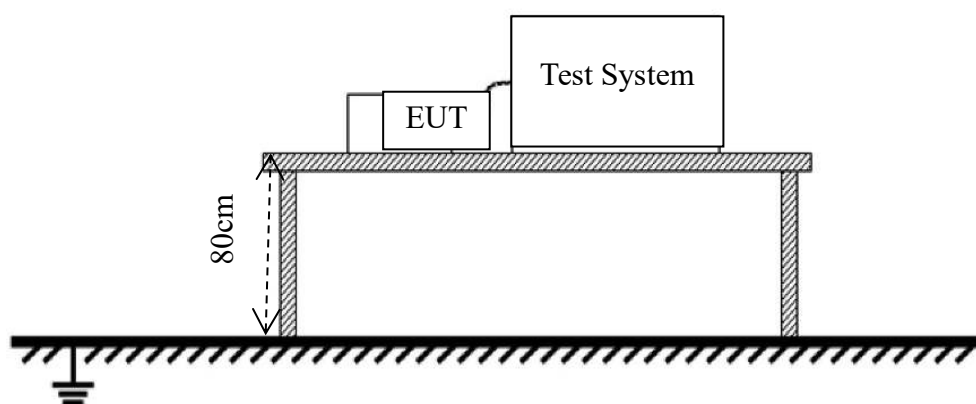

## 4.6. Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1
	Test Configuration	TC01, TC02, TC03, TC04, TC05
Conducted Emission	Test Env.	NTNV
	Test Setup	Test Setup 2
	Test Configuration	TC01, TC02, TC03, TC05
Harmonic Current Emissions	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01
Voltage Fluctuations & Flicker	Test Env.	NTNV
	Test Setup	Test Setup 4
	Test Configuration	TC01
Electrostatic Discharge Immunity	Test Env.	NTNV
	Test Setup	Test Setup 5
	Test Configuration	TC01
Radiated RF Electromagnetic Field Immunity	Test Env.	NTNV
	Test Setup	Test Setup 6
	Test Configuration	TC01
Electrical Fast Transient/Burst Immunity	Test Env.	NTNV
	Test Setup	Test Setup 7
	Test Configuration	TC01
Surge Immunity	Test Env.	NTNV
	Test Setup	Test Setup 8
	Test Configuration	TC01
Immunity to Conducted Disturbances Induced by RF Fields	Test Env.	NTNV
	Test Setup	Test Setup 9
	Test Configuration	TC01
Power-frequency magnetic field	Test Env.	NTNV
	Test Setup	Test Setup 10
	Test Configuration	TC01
Voltage Dips and Short Interruptions Immunity	Test Env.	NTNV
	Test Setup	Test Setup 11
	Test Configuration	TC01
Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The grid-connected (100% Load) is the worst test mode in this report.		

## 5. TEST ITEMS

### 5.1. Emission Tests

#### 5.1.1. Radiated Emission

##### 5.1.1.1. Limit

Frequency range (MHz)	Distance (at 3 m)	Distance (at 10 m)
	Quasi-Peak Limit (dB $\mu$ V/m)	Quasi-Peak Limit (dB $\mu$ V/m)
30 - 230	40	30
230 - 1000	47	37

Frequency range (MHz)	Distance (at 3 m)	
	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
1000-3000	70	50
3000-6000	74	54

#### NOTE:

- 1) For apparatus containing devices operating at frequencies less than 9kHz measurements only need to be performed up to 230MHz.
- 2) If the highest internal frequency of the EUT is less than 108MHz, the measurement shall only be made up to 1GHz; If the highest internal frequency of the EUT is between 108MHz and 500MHz, the measurement shall only be made up to 2GHz; If the highest internal frequency of the EUT is between 500MHz and 1GHz, the measurement shall only be made up to 5GHz; If the highest internal frequency of the EUT is above 1GHz, the measurement shall be made up to 6GHz; Where the highest internal frequency is not known, tests shall be performed up to 6GHz.
- 3) At transitional frequencies the lower limit applies.

##### 5.1.1.2. Test Procedure

All Radiated Emission tests were performed in the azimuth plane. And test data and plots are recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

## 5.1.2. Conducted Emission

### 5.1.2.1. Test Limit

#### AC Port

Frequency range (MHz)	Quasi-peak (dBuV)	Average (dBuV)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

#### NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm for the frequency in the range 0.15 - 0.50 MHz.
- 3) It is tested under the low voltage which is for the distribution of AC electric power, the upper limit is generally accepted to be 1000 V.

#### DC Port

Frequency range (MHz)	Quasi-peak (dBuV)	Average (dBuV)
V - AN		
0.15 - 0.50	79	66
0.50 - 30	73	60
$\Delta$ - AN		
0.15 - 0.50	84-74	74-64
0.50 - 30	74	64

#### NOTE:

- 1) The lower limit shall apply at the band edges.

#### Telecom Port

Frequency range (MHz)	Quasi-peak (dBuV)	Average (dBuV)
0.15 - 0.50	84-74	74-64
0.50 - 30	74	64

#### NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150  $\Omega$  to telecommunication port under test.

### Discontinuous disturbances

The click limit  $L_q$  is calculated by increasing the relevant quasi-peak limit  $L$  for continuous disturbances (as given in AC Port quasi-peak limit) by:

Frequency (MHz)	Click rate $N$	
	Click limit $L_q$ (dB) $N < 0,2$	Click limit $L_q$ (dB) $0,2 \leq N < 30$
0.15 - 30	AC Port quasi-peak limit + 44	AC Port quasi-peak limit + $20 \lg (30/N)$

### 5.1.2.2. Test Procedure

The EUT is connected to the power mains through a LISN which provides 50  $\Omega$ /50  $\mu$ H or 150  $\Omega$  of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Telecommunication port was checked to find out the maximum conducted emission.

### 5.1.3. Harmonic Current Emissions ( $\leq 16A$ )

#### 5.1.3.1. Limit

For each harmonic order, all 1.5s smoothed r.m.s. harmonic current values, as defined as follows, shall be either:

- Less than or equal to 150% of the applicable limits, or
- Less than or equal to 200% of the applicable limits under the following conditions, which apply all together:
  - The EUT belongs to Class A for harmonics;
  - The excursion beyond 150% of the applicable limits lasts less than 10% of the test observation period or in total 10min (within the test observation period), whichever is smaller, and
  - The average value of the harmonic current, taken over the entire test observation period, is less than 90% of the applicable limits.

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5mA, whichever is greater, are disregarded.

For the 21<sup>st</sup> and higher odd order harmonics, the average value obtained for each individual odd harmonic over the full observation period, calculated from the 1.5s smoothed r.m.s., may exceed the applicable limits by 50% provided that the following conditions are met:

- The measured partial odd harmonic current does not exceed the partial odd harmonic current which can be calculated from the applicable limits;
- All 1.5s smoothed r.m.s. individual harmonic current values shall be less than or equal to 150% of the applicable limits.

Note: These exemptions (the use of the partial odd harmonic current for the average values and the 200% short term limit for single 1.5s smoothed values) are mutually exclusive and cannot be together.

Limits for Class A equipment				Limits for Class D equipment		
odd harmonic		Even harmonics		Harmonic order (n)	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
Harmonic order (n)	Maximum permissible harmonic current A	Harmonic order (n)	Maximum permissible harmonic current A			
3	2.30	2	1.08	3	3.4	2.30
5	1.14	4	0.43	5	1.9	1.14
7	0.77	6	0.30	7	1.0	0.77
9	0.40	8≤n≤40	0.23*(8/n)	9	0.5	0.40
11	0.33			11	0.35	0.33
13	0.21			15≤n≤39 (odd harmonics only)	3.85/n	0.15*(15/n)
15≤n≤39	0.15*(15/n)					
Note: For Class B equipment, the harmonics of the input current shall not exceed the values given in Table “limits for Class A equipment” multiplied by a factor of 1.5.						



For the purpose of harmonic current limitation, equipment is classified as follows:( Note: Class C equipment requirement not include in this standard.)

Class A:

- balanced three-phase equipment;
- household appliances, excluding equipment identified as class D;
- tools, excluding portable tools;
- dimmers for incandescent lamps;
- audio equipment.

Equipment not specified in one of the three other classes shall be considered as class A equipment.

Class B:

- portable tools;
- arc welding equipment which is not professional equipment.

Class C:

- lighting equipment.

Class D:

Equipment having a specified power according to 6.2.2 less than or equal to 600 W, of the following types:

- personal computers and personal computer monitors;
- television receivers.

#### 5.1.3.2. Test Procedure

The EUT is placed on the top of a wooden table 0.8m above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.

The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.

#### 5.1.4. Harmonic Current Emissions (>16A)

##### 5.1.4.1. Limit

$S_{SC}$

value of the three-phase short-circuit power calculated from the nominal interphase system voltage  $U_{nominal}$  and the line impedance  $Z$  of the system at the PCC:

$$S_{SC} = U_{nominal}^2 / Z$$

where  $Z$  is the system impedance at the power frequency

$S_{equ}$

value calculated from the rated current  $I_{equ}$  of the piece of equipment stated by the manufacturer and the rated voltage  $U_p$  (single phase) or  $U_i$  (interphase) as follows:

$$S_{equ} = U_p I_{equ} \quad \text{for single-phase equipment and the single-phase part of hybrid equipment}$$

$$S_{equ} = U_i I_{equ} \quad \text{for interphase equipment}$$

$$S_{equ} = \sqrt{3} U_i I_{equ} \quad \text{for balanced three-phase equipment and the three-phase part of hybrid equipment}$$

$$S_{equ} = \sqrt{3} U_i I_{equ \max} \quad \text{for unbalanced three-phase equipment}$$

$S_{sce}$

characteristic value of a piece of equipment defined as follows:

$$R_{sce} = S_{SC} / (3 S_{equ}) \quad \text{for single-phase equipment and the single-phase part of hybrid equipment}$$

$$R_{sce} = S_{SC} / (2 S_{equ}) \quad \text{for interphase equipment}$$

$$R_{sce} = S_{SC} / (S_{equ}) \quad \text{for all three-phase equipment and the three-phase part of hybrid equipment}$$

The limits given apply to 230/400 V, 50 Hz systems. The limits for the other systems will be added in a future edition of this standard.

NOTE 1 In some non-European countries, the proposed methodology cannot be applied because the short-circuit power data is not always available.

The harmonic current limits specified in the tables apply to each of the line currents and not to current in the neutral conductor.

For equipment with multiple rated currents, an assessment is made for each current.

As an example (for the same equipment):

Rated voltage: 230 V single phase, rated current:  $x$  A per phase, assessment and test at 230 V.

Rated voltage: 400 V three phase, rated current:  $y$  A per phase, assessment and test at 400 V.

The harmonic current limits are specified in Tables 2 to 5

Equipment complying with the harmonic current emission limits corresponding to  $R_{sce} = 33$  is suitable for connection at any point of the supply system.

NOTE 2 Values are based on a minimum value of  $R_{sce} = 33$ . Short-circuit ratios less than 33 are not considered.

NOTE 3 In order to reduce the depth of commutation notches of converters, a short-circuit ratio higher than 33 may be necessary.

For equipment not complying with the harmonic current emission limits corresponding to  $R_{sce} = 33$ , higher emission values are allowed, under the assumption that the short-circuit ratio  $R_{sce}$  is greater than 33. It is expected that this will apply to the majority of equipment with input current above 16 A per phase. See requirement for product documentation in Clause 6.

Table 2 is applied to equipment other than balanced three-phase equipment and Tables 3, 4 and 5 are applied to balanced three-phase equipment.

Table 3 may be used for any balanced three-phase piece of equipment.

Table 4 may be used with balanced three-phase equipment if any one of these conditions is met.

- a) The 5th and 7th harmonic currents are each less than 5 % of the reference current during the whole test observation period.
- b) The design of the piece of equipment is such that the phase angle of the 5th harmonic current has no preferential value over time and can take any value in the whole interval  $[0^\circ, 360^\circ]$
- c) The phase angle of the 5th harmonic current related to the fundamental phase-to-neutral voltage (see 3.16) is in the range of  $90^\circ$  to  $150^\circ$  during the whole test observation period.

Table 5 may be used with balanced three-phase equipment if any one of these conditions is met:

- d) The 5th and 7th harmonic currents are each less than 3 % of the reference current during the whole test observation period.
- e) The design of the piece of equipment is such that the phase angle of the 5th harmonic current has no preferential value over time and can take any value in the whole interval  $[0^\circ, 360^\circ]$ .
- f) The phase angle of the 5th harmonic current related to the fundamental phase-to-neutral voltage (see 3.16) is in the range of  $150^\circ$  to  $210^\circ$  during the whole test observation period.

Table 3, Table 4 or Table 5 can be applied to hybrid equipment in one of the following circumstances:

- a) hybrid equipment having a maximum 3rd harmonic current of less than 5 % of the reference current, or
- b) there is provision in the construction of hybrid equipment to separate the balanced three- phase and the single-phase or interphase loads for the measurement of supply currents, and when the current is being measured, the part of the equipment being measured draws the same current as under normal operating conditions. In that case, the relevant limits shall be applied separately to the single-phase or interphase part and to the balanced three-phase part. Table 3, Table 4 or Table 5 applies to the current of the balanced three- phase part, even if the rated current of the balanced three-phase part is less than or equal to 16 A per phase. Table 2 applies to the current of the single-phase or interphase part, but if the rated current of the single-phase or interphase part is less than or equal to 16 A, the manufacturer may apply the relevant limits of IEC 61000-3-2 to the single-phase or interphase part instead of the limits stated in Table 2.

For verification purposes, when circumstance b) above applies, the manufacturer shall state in the product documentation the rated current and give in the test report the measured and specified values of the input current as defined in 4.1, for each separate load. The value of  $R_{sce}$  for this type of hybrid equipment is determined as follows:

- the minimum  $R_{sce}$  value is first determined for each of the two loads, using the reference current of the considered part for the calculation of the harmonic current emissions to be compared to the limit values given in Tables 2 to 5; in case IEC 61000-3-2 is applied to the single-phase or interphase part instead of

Table 2 limits, the minimum  $R_{sce}$  value for this part is deemed to be equal to 33;

- then, for each of the two parts, the minimum value of  $S_{sc}$  is calculated from its minimum  $R_{sce}$  value and its rated current (see 3.11 and 3.14);
- finally, the value of  $R_{sce}$  for the hybrid equipment is determined from the highest of both minimum values of  $S_{sc}$  and the rated apparent power of the whole hybrid equipment.

Table 2 Current emission limits for equipment other than balanced three-phase equipment

Minimum $R_{sce}$	Admissible individual harmonic current $I_h/I_{ref}$ <sup>a</sup> %						Admissible harmonic parameters %	
	$I_3$	$I_5$	$I_7$	$I_9$	$I_{11}$	$I_{13}$	THC/ $I_{ref}$	PWHC/ $I_{ref}$
33	21.6	10.7	7.2	3.8	3.1	2	23	23
66	24	13	8	5	4	3	26	26
120	27	15	10	6	5	4	30	30
250	35	20	13	9	8	6	40	40
≥350	41	24	15	12	10	8	47	47

The relative values of even harmonics up to order 12 shall not exceed 16/h %. Even harmonics above order 12 are taken into account in THC and PWHC in the same way as odd order harmonics.  
Linear interpolation between successive  $R_{sce}$  values is permitted.  
a:  $I_{ref}$ =reference current;  $I_h$ =harmonica current component.

Table 3 Current emission limits for balanced three-phase equipment

Minimum $R_{sce}$	Admissible individual harmonic current $I_h/I_{ref}$ <sup>a</sup> %				Admissible harmonic parameters %	
	$I_5$	$I_7$	$I_{11}$	$I_{13}$	THC/ $I_{ref}$	PWHC/ $I_{ref}$
33	10.7	7.2	3.1	2	13	22
66	14	9	5	3	16	25
120	19	12	7	4	22	28
250	31	20	12	7	37	38
≥350	40	25	15	10	48	46

The relative values of even harmonics up to order 12 shall not exceed 16/h %. Even harmonics above order 12 are taken into account in THC and PWHC in the same way as odd order harmonics.  
Linear interpolation between successive  $R_{sce}$  values is permitted.  
a:  $I_{ref}$ =reference current;  $I_h$ =harmonica current component.

Table 4 Current emission for balanced three-phase equipment under specified conditions(a,b,c)

Minimum $R_{sce}$	Admissible individual harmonic current $I_h/I_{ref}^a$ %				Admissible harmonic parameters %	
	$I_5$	$I_7$	$I_{11}$	$I_{13}$	THC/ $I_{ref}$	PWHC/ $I_{ref}$
33	10.7	7.2	3.1	2	13	22
$\geq 120$	40	25	15	10	48	46

The relative values of even harmonics up to order 12 shall not exceed 16/h %. Even harmonics above order 12 are taken into account in THC and PWHC in the same way as odd order harmonics.  
Linear interpolation between successive  $R_{sce}$  values is permitted.  
a:  $I_{ref}$ =reference current;  $I_h$ =harmonica current component.

Table 5 Current emission for balanced three-phase equipment under specified conditions(d,e,f)

Minimum $R_{sce} = 33$	Admissible individual harmonic current $I_h/I_{ref}^a$ %												Admissible harmonic parameters %	
	$I_5$	$I_7$	$I_{11}$	$I_{13}$	$I_{17}$	$I_{19}$	$I_{23}$	$I_{25}$	$I_{29}$	$I_{31}$	$I_{35}$	$I_{37}$	THC/ $I_{ref}$	PWHC/ $I_{ref}$
--														
33	10.7	7.2	3.1	2	2	1.5	1.5	1.5	1	1	1	1	13	22
$\geq 250$	25	17.3	12.1	10.7	8.4	7.8	6.8	6.5	5.4	5.2	4.9	4.7	35	70

For  $R_{sce}$  equal to 33, the relative values of even harmonics up to order 12 shall not exceed 16/h %. The relative values of all harmonics from  $I_{14}$  to  $I_{40}$  not listed above shall not exceed 1% of  $I_{ref}$ .  
For  $R_{sce} \geq 250$ , the relative values of even harmonics up to order 12 shall not exceed 16/h %. The relative values of all harmonics from  $I_{14}$  to  $I_{40}$  not listed above shall not exceed 3% of  $I_{ref}$ .  
Linear interpolation between both  $R_{sce}$  values is permitted.  
a:  $I_{ref}$ =reference current;  $I_h$ =harmonica current component.

### 5.1.5. Voltage Fluctuations and Flicker

#### 5.1.5.1. Limit

The following limits apply:

- The value of  $P_{st}$  shall not be greater than 1.0;
  - The value of  $P_{lt}$  shall not be greater than 0.65;
  - $T_{max}$ , the accumulated time value of  $d(t)$  with a deviation exceeding 3.3% during a single voltage change at the EUT terminals, shall not exceed 500ms;
  - The maximum relative steady-state voltage change,  $dc$ , shall not exceed 3.3%;
  - The maximum relative voltage change  $d_{max}$ , shall not exceed:
    - a) 4% without additional conditions;
    - b) 6% for equipment which is:
      - switched manually, or
      - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.
- Note: The cycling frequency is further limited by the  $P_{st}$  and  $P_{lt}$  limits.
- c) 7% for equipment which is:
    - attended whilst in use, or
    - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

In the case of equipment having several separately controlled circuits with limits b) and c) shall apply only if there is delayed or manual restart after a power supply interruption; for all equipment with automatic switching which is energized immediately on restoration of supply after a power supply interruption, limits a) shall apply; for all equipment with manual switching, limits b) or c) shall apply depending on the rate of switching.

$P_{st}$  and  $P_{lt}$  requirement shall not be applied to voltage changes caused by manual switching.

The limits shall not be applied to voltage changes associated with emergency switching or emergency interruptions.

#### 5.1.5.2. Test Procedure

During the Flicker measurement, the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours. The test specifications refer the next table.

No.	Specification	Value
1	Test Frequency	50 Hz
2	Test Voltage	230 VAC
3	Waveform	Sine
4	Test Time	10 minutes for $P_{st}$ ; 2 hours for $P_{lt}$

## 5.2. Immunity Tests

### 5.2.1. Test Performance Criteria for Immunity Test

#### 5.2.1.1. General Performance Criteria

Type	Description
Criterion A	The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
Criterion C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

## 5.2.2. Electrostatic Discharge Immunity

### 5.2.2.1. Test Specification

Specification	Value
Basic Standard	IEC 61000-4-2:2008
Discharge Impedance	330 Ohm / 150 pF
Discharge Voltage	Air Discharge: 2 kV; 4 kV; 8 kV; Contact Discharge: 2 kV; 4 kV
Polarity	Positive / Negative
Number of Discharge	Minimum 20 times at each test point
Discharge Mode	Single discharge
Discharge Period	1 second minimum

### 5.2.2.2. Test Procedure

1. Electrostatic discharges are applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
2. The test is performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
3. The time interval between two successive single discharges is at least 1 second.
4. The ESD generator is held perpendicularly to the surface to which the discharge is applied and the return cable is at least 0.2 meters from the EUT.
5. Contact discharges are applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
6. Air discharges are applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator is removed from the EUT and re-triggered for a new single discharge. The test is repeated until all discharges were completed.
7. At least ten single discharges (in the most sensitive polarity) are applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator is positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
8. At least ten single discharges (in the most sensitive polarity) are applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5 m\*0.5 m) is placed vertically to and 0.1 meters from the EUT.



### 5.2.3. Radio Frequency Electromagnetic Field Immunity

#### 5.2.3.1. Test Specification

Specification	Value	
Basic Standard	IEC 61000-4-3:2006+A1:2007+A2:2010	
Frequency Range	80 MHz to 1000 MHz	1.4 GHz to 6.0 GHz
Field Strength	3 V/m (unmodulated, r.m.s)	3 V/m (unmodulated, r.m.s)
Modulation	1 kHz sine wave, 80%, AM modulation	
Frequency Step	1% of fundamental	
Polarity of Antenna	Horizontal and Vertical	
Test Distance	3 m	
Antenna Height	1.5 m	
Dwell Time	3 seconds	

#### 5.2.3.2. Test Procedure

1. The testing is performed in a fully anechoic chamber. The transmit antenna is located at a distance of 3 meters from the EUT.
2. The test signal is 80% amplitude modulated with a 1 kHz sine wave.
3. The frequency range is swept from 80 MHz to 1000 MHz and 1400 MHz to 6000 MHz with the exception of the exclusion band for transmitters, receivers and duplex transceivers. The rate of sweep does not exceed  $1.5 \times 10^{-3}$  decade/s. Where the frequency range is swept incrementally, the step size is 1% of fundamental.
4. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
5. The field strength level is 3 V/m for 80 MHz to 1000MHz, 1400 MHz to 2000 MHz and 1 V/m for 2000 MHz to 2700 MHz
6. The test is performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides, but only the worst side data is reported in this report.

## 5.2.4. Electrical Fast Transient / Burst Immunity

### 5.2.4.1. Test Specification

Specification	Value	
Basic Standard	IEC 61000-4-4:2012	
Test Voltage	AC Power Port: 0.5 kV, 1 kV.	
	DC Power Port: 0.5 kV.	
	Signal Port: 0.25 kV, 0.5 kV.	
Polarity	Positive / Negative	
Impulse Frequency	5 kHz	100 kHz
Impulse Wave Shape	5/50 ns	
Burst Duration	15 ms	0.75 ms
Burst Period	300 ms	
Test Duration	> 1 min	

#### NOTE:

- 1) The signal ports tests apply only to ports interfacing with cables whose total length according to the manufacturer's functional specification may exceed 3 m.
- 2) The DC ports test not applicable to input ports intended for connection to a battery or a rechargeable battery which must be removed or disconnected from the apparatus for recharging.
- 3) The EUT with a DC power input port intended for use with an AC-DC power adaptor shall be tested on the AC power input of the AC-DC power adaptor specified by the manufacturer or where none is so specified, using a typical AC-DC power adaptor.
- 4) The test applicable to DC power input ports and signal ports intended to be connected permanently to cables longer than 3 m.

### 5.2.4.2. Test Procedure

1. The EUT is tested with 1000 V discharges to the AC power input leads, 500 V for signal port and DC port.
2. Both positive and negative polarity discharges are applied.
3. The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 m.
4. The duration time of each test sequential is 1min.
5. The transient / burst waveform is in accordance with IEC 61000-4-4:2012, 5/50 ns.

## 5.2.5. Surge Immunity

### 5.2.5.1. Test Specification

Specification		Value		
Ports class		AC Power Port	DC Power Port	Signal Port
Basic Standard		IEC 61000-4-5:2014		
Waveform		Voltage: 1.2/50 μs; Current: 8/20 μs		
Test Voltage	line to ground	0.5 kV, 1 kV, 2 kV;	0.5 kV, 1 kV	0.5 kV, 1 kV
	line to line	0.5 kV, 1 kV	0.5 kV	/
Polarity		Positive / Negative		
Phase Angle		0°, 90°, 180°, 270°	N/A	
Repetition Rate		60 seconds		
Times		5 times per condition		

#### NOTE:

- 1) For ports where primary protection is intended, surges are applied at voltages up to 4 kV with the primary protectors fitted. Otherwise the 1 kV test level is applied without primary protection in place.
- 2) The DC ports test not applicable to input ports intended for connection to a battery or a rechargeable battery which must be removed or disconnected from the apparatus for recharging.
- 3) The EUT with a DC power input port intended for use with an AC-DC power adaptor shall be tested on the AC power input of the AC-DC power adaptor specified by the manufacturer or where none is so specified, using a typical AC-DC power adaptor.
- 4) DC ports which are not intended to be connected to a DC distribution network are treated as signal ports.

### 5.2.5.2. Test Procedure

The EUT and the auxiliary equipment are placed on a table of 0.8 m heights above a metal ground reference plane. The size of ground plane is greater than 1 m\*1 m and project beyond the EUT by at least 0.1 m on all sides. The ground plane is connected to the protective earth. The length of power cord between the coupling device and the EUT is less than 2 meters (provided by the manufacturer).

The EUT is connected to the power mains through a coupling device that directly couples the surge interference signal. The surge noise is applied synchronized to the voltage phase at the zero crossing and the peak value of the AC voltage wave (positive and negative).

The surges are applied line to line and line(s) to earth. When testing line to earth the test voltage is applied successively between each of the lines and earth. Set up to the test level specified increased the test voltage. All lower levels including the selected test level are tested. The polarity of each surge level included positive and negative test pulses.

## 5.2.6. Immunity to Conducted Disturbances Induced by RF Fields

### 5.2.6.1. Test Specification

Specification	Value		
Basic Standard	IEC 61000-4-6:2013		
Frequency Range	0.15 MHz – 80 MHz		
Test Voltage	3 V (unmodulated, r.m.s)		
Modulation	1 kHz sine wave, 80% AM		
Frequency Step	1% of fundamental		
Coupled Cable	AC Power Line	DC Power Line	Signal Line
Coupling Device	CDN-M1/2/3/4/5		

#### NOTE:

- 1) The DC port and Signal port only apply to ports interfacing with cables whose total length according to the manufacturers functional specification may exceed 3 m.
- 2) The AC port only apply to input ports.
- 3) The test level can also be defined as the equivalent current into a 150  $\Omega$  load at signal ports.

### 5.2.6.2. Test Procedure

The EUT shall be tested within its intended operating and climatic conditions.

The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 150 Ohm load resistor.

The test signal is 80% amplitude modulated with a 1 kHz sine wave.

The frequency range is swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80% amplitude. The sweep rate shall not exceed  $1.5 \times 10^{-3}$  decades/s. The step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value where the frequency is swept incrementally.

The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequencies and harmonics or frequencies of dominant interest, shall be analyzed separately.

Attempts should be made to fully exercise the EUT during test, and to fully interrogate all exercise modes selected for susceptibility.

## 5.2.7. Power Frequency Magnetic Fields Immunity

### 5.2.7.1. Test Specification

Specification	Value
Basic Standard	IEC 61000-4-8:2009
Field Frequency	50/60 Hz
Test Level	3 A/m
Polarity	Horizontal and Vertical
Test Duration	5 min

#### NOTE:

- 1) The test shall be carried out at the frequencies appropriate to the power supply frequency. Equipment intended for use in areas supplied only at one of these frequencies need only be tested at that frequency.
- 2) Applicable only to apparatus containing devices susceptible to magnetic fields.

### 5.2.7.2. Test Procedure

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1 m\*1 m) and shown in Section 15.1. The induction coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.

## 5.2.8. Voltage Dips and Short Interruptions Immunity

### 5.2.8.1. Test Specification

#### AC Ports

Specification	Value
Basic Standard	IEC 61000-4-11:2004; IEC 61000-4-34:2005+A1:2009
Frequency	50/60Hz
Voltage Dips	100% reduction: 10 ms 100% reduction: 20/24 ms 30% reduction: 500/600 ms
Voltage Interruptions	100% reduction: 5000/6000 ms
Voltage Phase Angle	0°

#### NOTE:

- 1) Applicable only to AC input ports.

### 5.2.8.2. Test Procedure

The power cord is used as supplied by the manufacturer. The EUT was connected to the line output of the Voltage Dips and Interruption Generator.

The EUT is tested for a) 100% voltage dip of supplied voltage with duration of 10 ms; b) 100% voltage dip of supplied voltage with duration of 20 or 24 ms; c) 30% voltage dip of supplied voltage and duration 500 or 600 ms. Both of the dip tests are carried out for a sequence of three voltage dips with intervals of 10 seconds.

100% voltage interruption of supplied voltage with duration of 5000 or 6000 ms is followed, which is a sequence of three voltage interruptions with intervals of 10 seconds.

Voltage reductions occur at 0 degrees crossover point of the voltage waveform. The performance of the EUT is checked after the voltage dip or interruption.

## ANNEX A TEST RESULTS

### A.1 Radiated Emission


Note 1: The symbol of "--" in the table which means not application.

Note 2: Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30 MHz to 1000 MHz. To reduce the testing time, a peak measuring receiver may be used instead of a quasi-peak measuring receiver. In case of dispute, measurement with a quasi-peak measuring receiver will take precedence.

#### Test Data and Plots- (Below 1 GHz)


The worst test mode: Grid-connection (100% Load)

##### A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

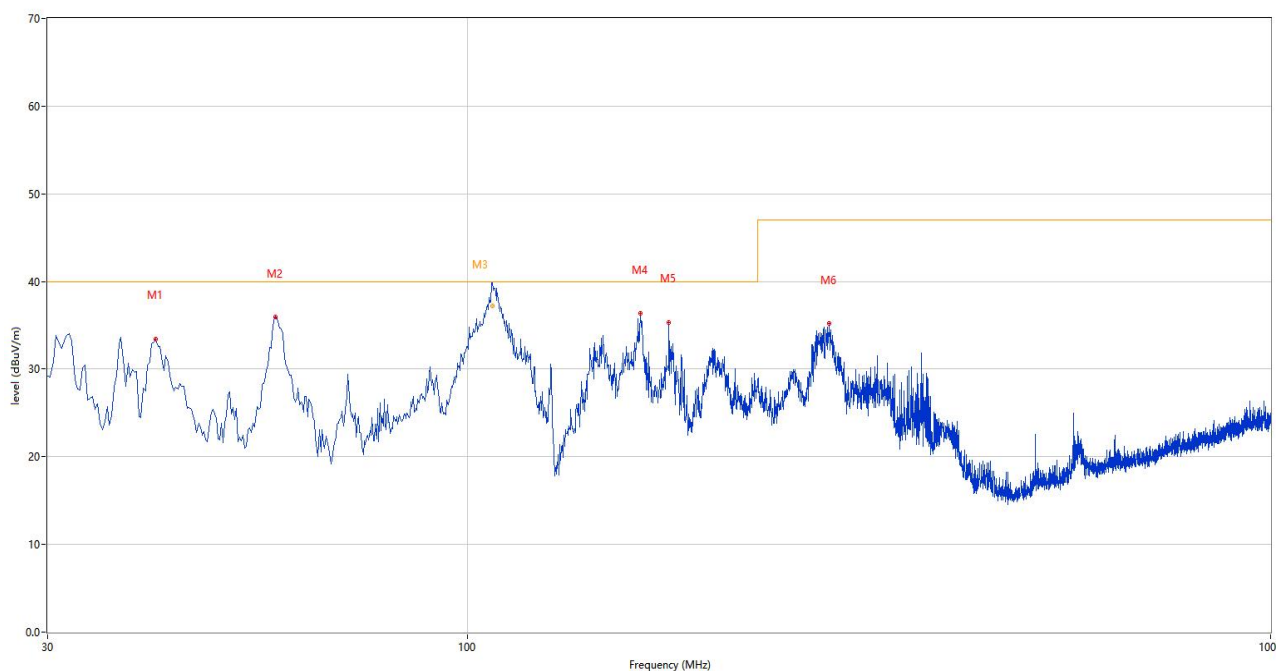

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	40.913	33.44	-26.74	40.0	-6.56	Peak	0.00	200	Vertical	P
2	57.645	35.90	-26.96	40.0	-4.10	Peak	216.00	100	Vertical	P
3*	107.358	37.24	-27.44	40.0	-2.76	QP	141.00	100	Vertical	P
4	164.345	36.38	-29.93	40.0	-3.62	Peak	35.00	100	Vertical	P
5	178.167	35.36	-29.24	40.0	-4.64	Peak	99.00	100	Vertical	P
6	282.200	35.19	-24.90	47.0	-11.81	Peak	169.00	100	Vertical	P

## A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

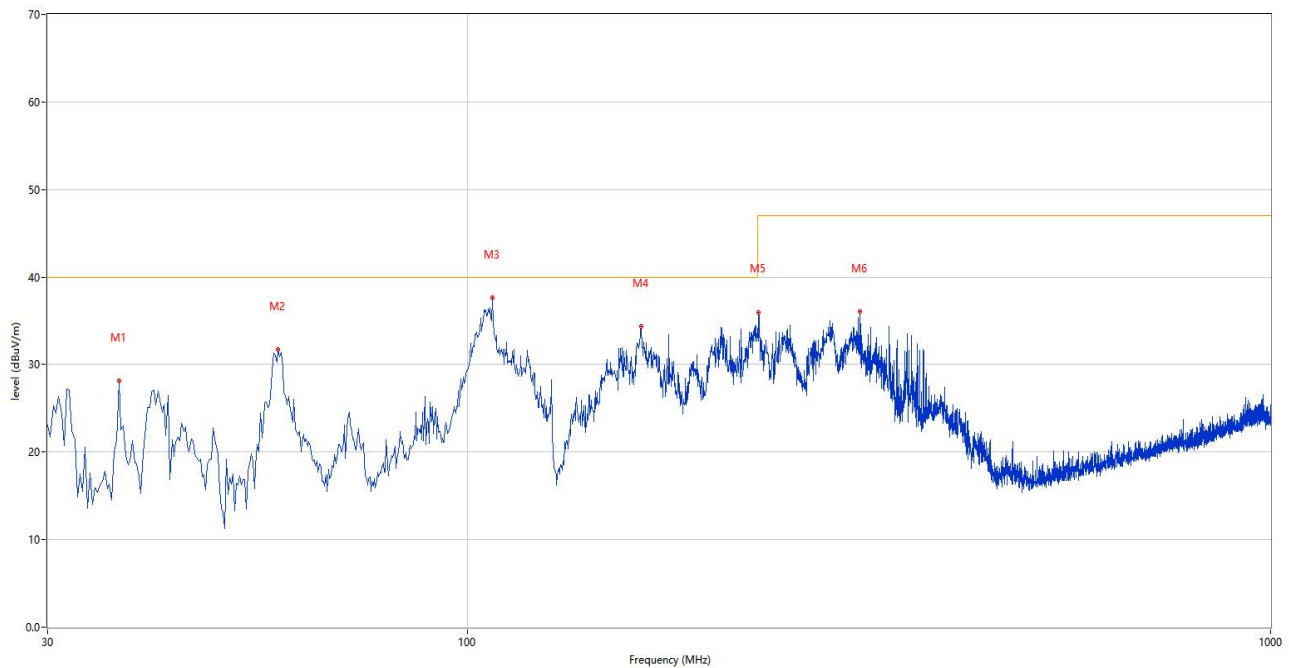

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	36.790	28.12	-28.13	40.0	-11.88	Peak	0.00	100	Horizontal	P
2	58.130	31.68	-27.09	40.0	-8.32	Peak	0.00	100	Horizontal	P
3	107.357	36.59	-27.44	40.0	-3.41	Peak	252.00	200	Horizontal	P
4	164.587	34.33	-29.92	40.0	-5.67	Peak	263.00	300	Horizontal	P
5	230.548	35.99	-26.30	47.0	-11.01	Peak	154.00	100	Horizontal	P
6	308.147	36.05	-24.25	47.0	-10.95	Peak	167.00	100	Horizontal	P




## A.2 Conducted Emission

### Test Data and Plots-AC Port


The worst test mode: Grid-connection (100% Load)

#### A.2.1 L1 Phase

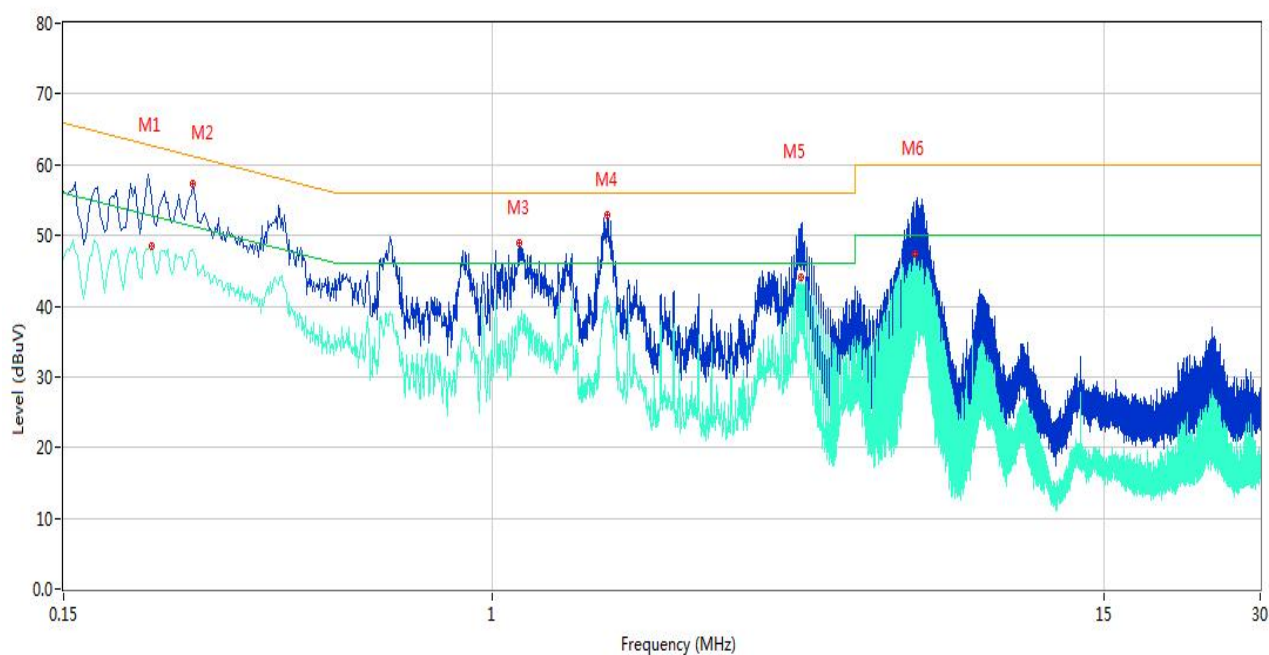


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.222	55.31	9.99	62.74	-7.43	Peak	L1	P
1**	0.222	48.51	9.99	52.74	-4.23	AV	L1	P
2	0.266	57.20	9.97	61.24	-4.04	Peak	L1	P
2**	0.266	48.03	9.97	51.24	-3.21	AV	L1	P
3	1.126	48.97	10.01	56.00	-7.03	Peak	L1	P
3**	1.126	37.67	10.01	46.00	-8.33	AV	L1	P
4	1.666	52.87	10.04	56.00	-3.13	Peak	L1	P
4**	1.666	41.34	10.04	46.00	-4.66	AV	L1	P
5	3.944	51.00	10.04	56.00	-5.00	Peak	L1	P
5**	3.944	43.19	10.04	46.00	-2.81	AV	L1	P
6	6.484	54.48	9.99	60.00	-5.52	Peak	L1	P
6**	6.484	47.50	9.99	50.00	-2.50	AV	L1	P

## A.2.2 L2 Phase

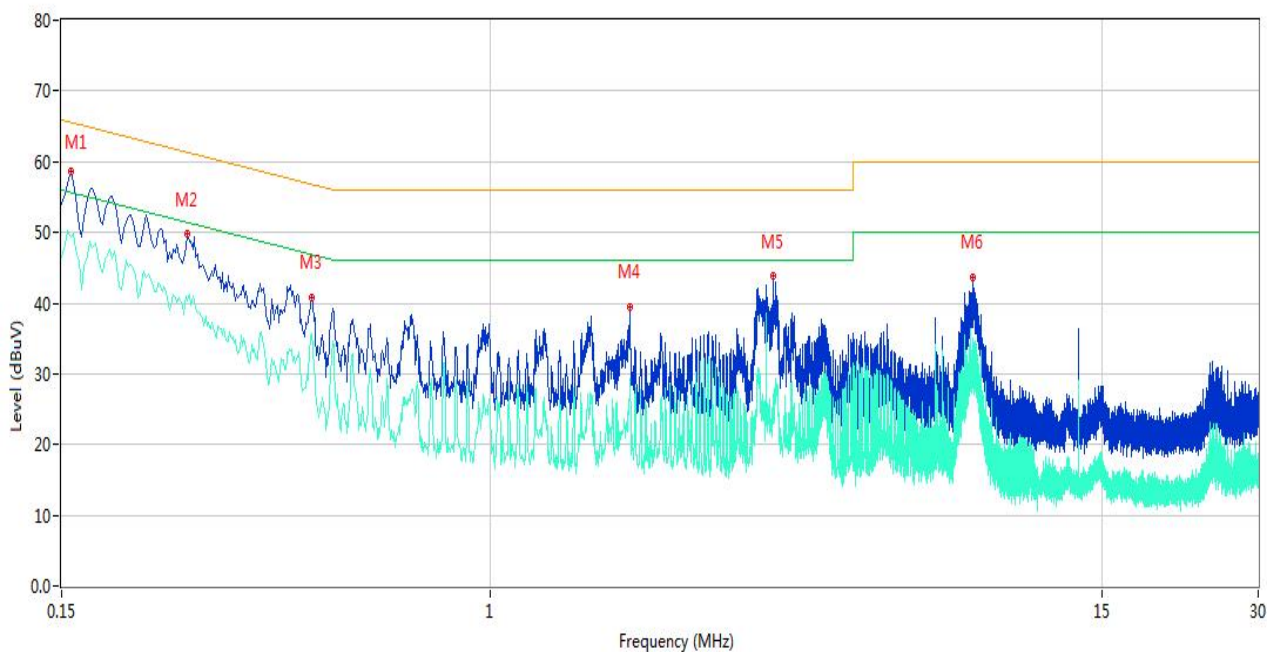


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	58.64	10.07	65.67	-7.03	Peak	L2	P
1**	0.156	49.44	10.07	55.67	-6.23	AV	L2	P
2	0.262	49.73	9.99	61.37	-11.64	Peak	L2	P
2**	0.262	40.39	9.99	51.37	-10.98	AV	L2	P
3	0.454	40.75	9.99	56.80	-16.05	Peak	L2	P
3**	0.454	35.78	9.99	46.80	-11.02	AV	L2	P
4	1.860	39.53	10.04	56.00	-16.47	Peak	L2	P
4**	1.860	29.21	10.04	46.00	-16.79	AV	L2	P
5	3.508	43.76	10.03	56.00	-12.24	Peak	L2	P
5**	3.508	23.92	10.03	46.00	-22.08	AV	L2	P
6	8.466	43.66	9.92	60.00	-16.34	Peak	L2	P
6**	8.466	34.95	9.92	50.00	-15.05	AV	L2	P

## A.2.3 L3 Phase

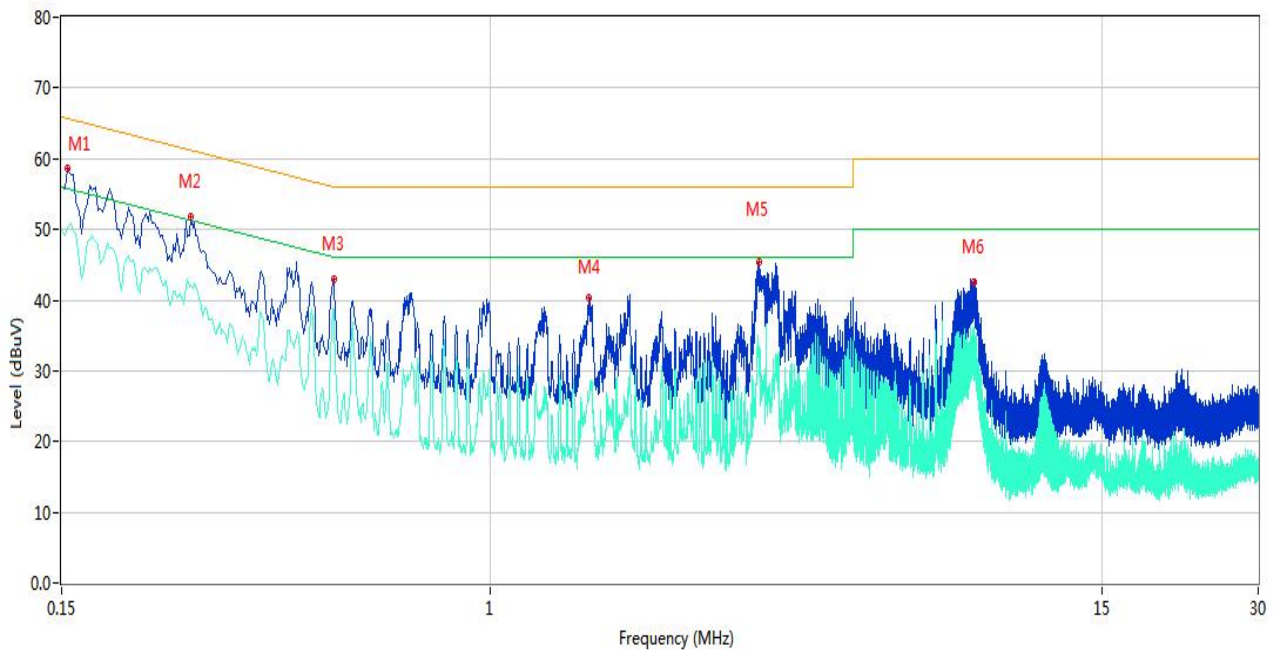

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	58.56	10.03	65.78	-7.22	Peak	L3	P
1**	0.154	50.15	10.03	55.78	-5.63	AV	L3	P
2	0.266	51.86	9.97	61.24	-9.38	Peak	L3	P
2**	0.266	41.99	9.97	51.24	-9.25	AV	L3	P
3	0.500	43.08	9.96	56.00	-12.92	Peak	L3	P
3**	0.500	38.65	9.96	46.00	-7.35	AV	L3	P
4	1.552	40.33	10.02	56.00	-15.67	Peak	L3	P
4**	1.552	26.17	10.02	46.00	-19.83	AV	L3	P
5	3.284	45.32	10.06	56.00	-10.68	Peak	L3	P
5**	3.284	32.32	10.06	46.00	-13.68	AV	L3	P
6	8.524	42.57	9.93	60.00	-17.43	Peak	L3	P
6**	8.524	36.21	9.93	50.00	-13.79	AV	L3	P

## A.2.4 N Phase

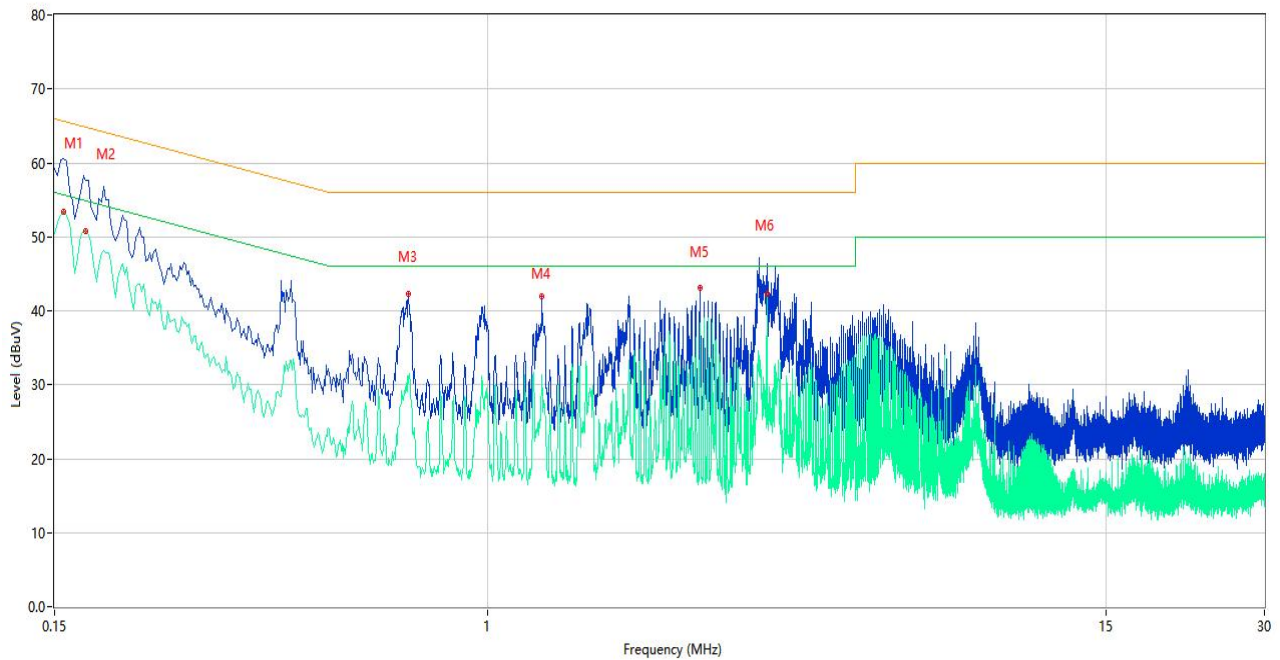

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	60.60	10.07	65.67	-5.07	Peak	N	P
1**	0.156	53.37	10.07	55.67	-2.30	AV	N	P
2	0.172	57.71	10.01	64.86	-7.15	Peak	N	P
2**	0.172	50.76	10.01	54.86	-4.10	AV	N	P
3	0.706	42.32	10.02	56.00	-13.68	Peak	N	P
3**	0.706	31.06	10.02	46.00	-14.94	AV	N	P
4	1.266	42.02	10.03	56.00	-13.98	Peak	N	P
4**	1.266	31.30	10.03	46.00	-14.70	AV	N	P
5	2.532	43.07	10.06	56.00	-12.93	Peak	N	P
5**	2.532	37.80	10.06	46.00	-8.20	AV	N	P
6	3.398	46.29	10.01	56.00	-9.71	Peak	N	P
6**	3.398	42.28	10.01	46.00	-3.72	AV	N	P

### A.3 Harmonic Current Emissions

Harmonic Current Emissions (>16A) EUT classification: Balanced three-phase equipment Phase: L1						
Power Rsce	33		Frequency		50.01	Hz
	Average				Maximum	
Voltage (rms)	231.18	V	Voltage (rms)		233.14	V
Current (rms)	17.39	A	Current (rms)		17.55	A
Power Factor	0.95	-	Power Factor		0.96	-
Active power	4020.49	W	Active power		4088.48	W
THC	0.35	A	THC		0.42	A
Harmonic Number	Limit Current/%	Average/%	%Limit	Max Value/%	%Limit	Verdict
2	8	0.36	4.50%	0.75	6.28%	P
3	-	0.23	-	0.45	-	-
4	4	0.24	6.09%	0.48	7.94%	P
5	10.7	2.11	19.73%	2.39	14.89%	P
6	2.66	0.14	5.17%	0.29	7.28%	P
7	7.2	1.41	19.59%	1.64	15.23%	P
8	2	0.18	8.97%	0.36	11.95%	P
9	-	0.11	-	0.27	-	-
10	1.6	0.11	7.15%	0.27	11.28%	P
11	3.1	0.76	24.57%	0.92	19.75%	P
12	1.33	0.09	6.98%	0.19	9.30%	P
13	2	0.47	23.54%	0.60	20.12%	P
THC/I <sub>1</sub>	13	3.01	23.18%	3.40	17.41%	P
PWHC/I <sub>1</sub>	22	1.32	6.02%	1.66	5.03%	P

Harmonic Current Emissions (>16A) EUT classification: Balanced three-phase equipment Phase: L2						
Power Rsce	33		Frequency		50.01	Hz
	Average				Maximum	
Voltage (rms)	230.56	V	Voltage (rms)		232.00	V
Current (rms)	17.39	A	Current (rms)		17.52	A
Power Factor	0.95	-	Power Factor		0.96	-
Active power	4009.05	W	Active power		4046.44	W
THC	0.37	A	THC		0.42	A
Harmonic Number	Limit Current/%	Average/%	%Limit	Max Value/%	%Limit	Verdict
2	8	0.31	3.87%	0.63	5.25%	P
3	-	0.24	-	0.52	-	-
4	4	0.28	7.05%	0.55	9.23%	P
5	10.7	2.18	20.34%	2.48	15.43%	P
6	2.66	0.15	5.67%	0.35	8.87%	P
7	7.2	1.28	17.80%	1.56	14.44%	P
8	2	0.20	10.19%	0.35	11.72%	P
9	-	0.10	-	0.26	-	-
10	1.6	0.15	9.33%	0.35	14.79%	P
11	3.1	0.71	22.86%	0.86	18.39%	P
12	1.33	0.14	10.54%	0.31	15.51%	P
13	2	0.45	22.50%	0.60	20.17%	P
THC/I <sub>1</sub>	13	3.01	23.16%	3.36	17.21%	P
PWHC/I <sub>1</sub>	22	1.31	5.96%	1.79	5.43%	P

Harmonic Current Emissions (>16A) EUT classification: Balanced three-phase equipment Phase: L3						
Power Rsce	33		Frequency		50.02	Hz
	Average				Maximum	
Voltage (rms)	231.25	V	Voltage (rms)		231.84	V
Current (rms)	17.43	A	Current (rms)		17.58	A
Power Factor	0.95	-	Power Factor		0.96	-
Active power	4031.55	W	Active power		4061.11	W
THC	0.39	A	THC		0.40	A
Harmonic Number	Limit Current/%	Average/%	%Limit	Max Value/%	%Limit	Verdict
2	8	0.24	3.05%	0.48	3.96%	P
3	-	0.22	-	0.45	-	-
4	4	0.24	5.98%	0.44	7.30%	P
5	10.7	2.08	19.46%	2.30	14.34%	P
6	2.66	0.08	2.85%	0.20	5.00%	P
7	7.2	1.41	19.58%	1.64	15.14%	P
8	2	0.10	5.19%	0.28	9.27%	P
9	-	0.08	-	0.18	-	-
10	1.6	0.11	6.60%	0.23	9.41%	P
11	3.1	0.64	20.54%	0.81	17.33%	P
12	1.33	0.08	6.08%	0.21	10.28%	P
13	2	0.47	23.46%	0.62	20.74%	P
THC/I <sub>1</sub>	13	3.36	25.83%	7.96	40.85%	P
PWHC/I <sub>1</sub>	22	1.33	6.03%	1.74	5.29%	P

Harmonic Current Emissions (<16A) EUT classification: Class A equipment Phase: L1						
	Average				Maximum	
Voltage (rms)	231.43	V	Voltage (rms)	231.75	V	
Current (rms)	15.24	A	Current (rms)	15.87	A	
Active power	3524.89	W	Active power	3548.41	W	
Power Factor	0.95	-	Power Factor	0.97	-	
Harmonic Number	Limit Current/A	Average/A	%Limit	Max Value/A	%Limit	Verdict
2	2.000	0.063	3.13%	0.132	6.61%	P
3	5.000	0.040	0.81%	0.078	1.57%	P
4	1.000	0.042	4.24%	0.084	8.36%	P
5	6.000	0.367	6.12%	0.419	6.99%	P
6	0.500	0.024	4.79%	0.051	10.20%	P
7	5.000	0.245	4.91%	0.289	5.77%	P
8	0.500	0.031	6.24%	0.063	12.58%	P
9	1.500	0.019	1.28%	0.047	3.11%	P
10	0.500	0.020	3.98%	0.048	9.50%	P
11	3.500	0.132	3.78%	0.161	4.60%	P
12	0.458	0.016	3.52%	0.033	7.10%	P
13	3.000	0.082	2.73%	0.106	3.53%	P
14	0.429	0.013	2.99%	0.035	8.11%	P
15	0.400	0.016	4.04%	0.036	8.94%	P
16	0.406	0.009	2.14%	0.025	6.12%	P
17	2.000	0.036	1.79%	0.057	2.87%	P
18	0.389	0.007	1.91%	0.017	4.41%	P
19	1.761	0.020	1.15%	0.033	1.89%	P
20	0.375	0.005	1.43%	0.013	3.58%	P
21	0.300	0.006	1.90%	0.012	3.95%	P
22	0.364	0.005	1.28%	0.012	3.43%	P
23	1.408	0.005	0.39%	0.016	1.14%	P
24	0.354	0.004	1.08%	0.010	2.81%	P
25	1.274	0.006	0.47%	0.012	0.94%	P
26	0.346	0.004	1.19%	0.011	3.29%	P
27	0.200	0.004	1.87%	0.009	4.31%	P
28	0.339	0.003	0.94%	0.008	2.30%	P
29	1.061	0.006	0.52%	0.012	1.14%	P
30	0.333	0.003	0.81%	0.007	2.06%	P
31	0.975	0.006	0.66%	0.012	1.25%	P
32	0.328	0.003	0.81%	0.007	2.12%	P
33	0.200	0.003	1.26%	0.006	3.06%	P
34	0.324	0.002	0.70%	0.006	1.82%	P
35	0.833	0.006	0.76%	0.012	1.41%	P
36	0.319	0.002	0.61%	0.004	1.38%	P
37	0.773	0.005	0.59%	0.009	1.18%	P
38	0.316	0.002	0.58%	0.005	1.50%	P
39	0.200	0.002	0.83%	0.005	2.37%	P
40	0.313	0.002	0.54%	0.005	1.60%	P



Harmonic Current Emissions (<16A) EUT classification: Class A equipment Phase: L2						
	Average				Maximum	
Voltage (rms)	231.24	V	Voltage (rms)	231.85	V	
Current (rms)	15.18	A	Current (rms)	15.29	A	
Active power	3514.21	W	Active power	3545.11	W	
Power Factor	0.95	-	Power Factor	0.96	-	
Harmonic Number	Limit Current/A	Average/A	%Limit	Max Value/A	%Limit	Verdict
2	2.000	0.054	2.69%	0.110	5.51%	P
3	5.000	0.041	0.83%	0.091	1.83%	P
4	1.000	0.049	4.90%	0.097	9.70%	P
5	6.000	0.378	6.31%	0.434	7.23%	P
6	0.500	0.026	5.25%	0.062	12.39%	P
7	5.000	0.223	4.46%	0.273	5.46%	P
8	0.500	0.035	7.09%	0.062	12.32%	P
9	1.500	0.018	1.18%	0.045	2.98%	P
10	0.500	0.026	5.19%	0.062	12.44%	P
11	3.500	0.123	3.52%	0.150	4.28%	P
12	0.458	0.024	5.32%	0.054	11.83%	P
13	3.000	0.078	2.61%	0.106	3.53%	P
14	0.429	0.015	3.50%	0.035	8.07%	P
15	0.400	0.017	4.24%	0.041	10.33%	P
16	0.406	0.012	2.90%	0.029	7.05%	P
17	2.000	0.032	1.61%	0.050	2.50%	P
18	0.389	0.007	1.91%	0.018	4.51%	P
19	1.761	0.016	0.93%	0.032	1.80%	P
20	0.375	0.007	1.85%	0.021	5.71%	P
21	0.300	0.006	1.97%	0.015	5.09%	P
22	0.364	0.005	1.48%	0.013	3.45%	P
23	1.408	0.008	0.54%	0.018	1.27%	P
24	0.354	0.004	1.15%	0.012	3.39%	P
25	1.274	0.006	0.48%	0.014	1.11%	P
26	0.346	0.004	1.15%	0.009	2.64%	P
27	0.200	0.004	1.80%	0.009	4.52%	P
28	0.339	0.003	0.99%	0.010	2.92%	P
29	1.061	0.006	0.60%	0.012	1.14%	P
30	0.333	0.003	0.80%	0.009	2.59%	P
31	0.975	0.008	0.79%	0.013	1.30%	P
32	0.328	0.003	0.78%	0.006	1.96%	P
33	0.200	0.003	1.29%	0.007	3.61%	P
34	0.324	0.002	0.74%	0.006	1.84%	P
35	0.833	0.007	0.79%	0.011	1.34%	P
36	0.319	0.002	0.62%	0.005	1.58%	P
37	0.773	0.006	0.73%	0.010	1.27%	P
38	0.316	0.002	0.66%	0.005	1.73%	P
39	0.200	0.002	0.93%	0.006	2.82%	P
40	0.313	0.002	0.57%	0.005	1.70%	P

Harmonic Current Emissions (<16A) EUT classification: Class A equipment Phase: L3						
	Average				Maximum	
Voltage (rms)	231.43	V	Voltage (rms)	231.86	V	
Current (rms)	15.20	A	Current (rms)	15.54	A	
Active power	3517.87	W	Active power	3605.25	W	
Power Factor	0.95	-	Power Factor	0.97	-	
Harmonic Number	Limit Current/A	Average/A	%Limit	Max Value/A	%Limit	Verdict
2	2.000	0.042	2.12%	0.084	4.18%	P
3	5.000	0.038	0.75%	0.080	1.59%	P
4	1.000	0.042	4.17%	0.077	7.70%	P
5	6.000	0.363	6.05%	0.404	6.74%	P
6	0.500	0.013	2.64%	0.035	7.01%	P
7	5.000	0.246	4.92%	0.287	5.75%	P
8	0.500	0.018	3.62%	0.049	9.78%	P
9	1.500	0.013	0.88%	0.032	2.14%	P
10	0.500	0.018	3.68%	0.040	7.94%	P
11	3.500	0.111	3.17%	0.142	4.05%	P
12	0.458	0.014	3.08%	0.036	7.86%	P
13	3.000	0.082	2.73%	0.109	3.65%	P
14	0.429	0.013	3.00%	0.034	7.94%	P
15	0.400	0.014	3.51%	0.030	7.55%	P
16	0.406	0.010	2.39%	0.025	6.07%	P
17	2.000	0.037	1.87%	0.056	2.78%	P
18	0.389	0.007	1.71%	0.020	5.05%	P
19	1.761	0.021	1.20%	0.032	1.84%	P
20	0.375	0.006	1.71%	0.018	4.83%	P
21	0.300	0.005	1.78%	0.013	4.22%	P
22	0.364	0.005	1.44%	0.014	3.78%	P
23	1.408	0.007	0.46%	0.014	1.00%	P
24	0.354	0.003	0.96%	0.009	2.56%	P
25	1.274	0.004	0.35%	0.010	0.75%	P
26	0.346	0.004	1.04%	0.009	2.73%	P
27	0.200	0.003	1.51%	0.007	3.60%	P
28	0.339	0.003	0.88%	0.006	1.73%	P
29	1.061	0.005	0.47%	0.010	0.96%	P
30	0.333	0.002	0.64%	0.006	1.80%	P
31	0.975	0.007	0.72%	0.011	1.15%	P
32	0.328	0.002	0.64%	0.005	1.66%	P
33	0.200	0.002	0.97%	0.005	2.71%	P
34	0.324	0.002	0.55%	0.004	1.37%	P
35	0.833	0.006	0.68%	0.010	1.20%	P
36	0.319	0.002	0.52%	0.004	1.26%	P
37	0.773	0.005	0.67%	0.008	1.06%	P
38	0.316	0.001	0.47%	0.005	1.62%	P
39	0.200	0.002	0.76%	0.004	2.12%	P
40	0.313	0.001	0.47%	0.004	1.39%	P

## A.4 Voltage Fluctuations & Flicker

Voltage(V)	231.18	Frequency(Hz)	50.01
Current (A)	17.39	Coupling Line	L1
Test Parameter	Limit	Measurement Value	Verdict
P <sub>st</sub>	1.0	0.308	P
P <sub>lt</sub>	0.65	0.330	P
T <sub>dt</sub>	0.5	0	P
d <sub>max</sub> (%)	4	1.476	P
d <sub>c</sub> (%)	3.3	0.048	P

Voltage(V)	230.56	Frequency(Hz)	50.09
Current (A)	17.39	Coupling Line	L2
Test Parameter	Limit	Measurement Value	Verdict
P <sub>st</sub>	1.0	0.349	P
P <sub>lt</sub>	0.65	0.284	P
T <sub>dt</sub>	0.5	0	P
d <sub>max</sub> (%)	4	2.174	P
d <sub>c</sub> (%)	3.3	0.045	P

Voltage(V)	230.00	Frequency(Hz)	50.09
Current (A)	18.39	Coupling Line	L3
Test Parameter	Limit	Measurement Value	Verdict
P <sub>st</sub>	1.0	0.396	P
P <sub>lt</sub>	0.65	0.285	P
T <sub>dt</sub>	0.5	0	P
d <sub>max</sub> (%)	4	2.192	P
d <sub>c</sub> (%)	3.3	0.046	P

Voltage(V)	231.43	Frequency(Hz)	50.01
Current (A)	15.24	Coupling Line	L1
Test Parameter	Limit	Measurement Value	Verdict
P <sub>st</sub>	1.0	0.257	P
P <sub>lt</sub>	0.65	0.346	P
T <sub>dt</sub>	0.5	0	P
d <sub>max</sub> (%)	4	1.006	P
d <sub>c</sub> (%)	3.3	0.089	P

Voltage(V)	231.24	Frequency(Hz)	50.02
Current (A)	15.18	Coupling Line	L2
Test Parameter	Limit	Measurement Value	Verdict
P <sub>st</sub>	1.0	0.327	P
P <sub>lt</sub>	0.65	0.199	P
T <sub>dt</sub>	0.5	0	P
d <sub>max</sub> (%)	4	1.054	P
d <sub>c</sub> (%)	3.3	0.076	P

Voltage(V)	231.43	Frequency(Hz)	50.02
Current (A)	15.20	Coupling Line	L3
Test Parameter	Limit	Measurement Value	Verdict
P <sub>st</sub>	1.0	0.377	P
P <sub>lt</sub>	0.65	0.263	P
T <sub>dt</sub>	0.5	0	P
d <sub>max</sub> (%)	4	1.763	P
d <sub>c</sub> (%)	3.3	0.085	P

## A.5 Electrostatic Discharge Immunity

Test Points	Discharge Level (kV)	Discharge Mode	Number of Discharge	Met Criteria	Required Criteria	Verdict
HCP	±2, 4	Connect discharge	100	A	B	P
VCP	±2, 4	Connect discharge	100	A	B	P
Metal screw	±2, 4	Connect discharge	160	A	B	P
Heat sink	±2, 4	Connect discharge	160	A	B	P
Display screen	±2, 4, 8	Air discharge	160	A	B	P
Gap	±2, 4, 8	Air discharge	160	A	B	P

## A.6 Radio Frequency Electromagnetic Field Immunity

Antenna Polarity	Frequency (MHz)	Side	Field Strength (V/m)	Met Criteria	Required Criteria	Verdict
Vertical	80 - 1000	Front, Back, Left, Right	10	A	A	P
Horizontal	80 - 1000	Front, Back, Left, Right	10	A	A	P
Vertical	1400 - 6000	Front, Back, Left, Right	3	A	A	P
Horizontal	1400 - 6000	Front, Back, Left, Right	3	A	A	P

## A.7 Electrical Fast Transient/Burst Immunity

### Test Data (AC Power Port)

Burst Parameters	5/50ns	Pulse Frequency	5kHz	Pulse group action time	15ms		Burst interval	300ms
			100kHz		0.75ms			
Test Port	Coupling Line			Polarity	Test Level (kV)	Met Criteria	Required Criteria	Verdict
AC Port	L1+L2+L3+N+PE			+ / -	0.5, 1, 2	A	B	P

### Test Data (DC Power Port)

Burst Parameters	5/50ns	Pulse Frequency	5kHz	Pulse group action time	15ms		Burst interval	300ms
			100kHz		0.75ms			
Test Port	Coupling Line			Polarity	100kHz	Met Criteria	Required Criteria	Verdict
DC Port	P+&P-			+ / -	0.5,1	A	B	P

## A.8 Surge Immunity

### Test Data (AC Power Port)

Times	5 times for positive and negative		Time interval		60s		
Test Port	Coupling Line	Polarity	Voltage (kV)	Test Waveform	Met Criteria	Required Criteria	Verdict
AC Port	L1-N, L2-N, L3-N, L1-L2, L1-L3, L2-L3	+ / -	0.5, 1	1.2/50us	A	B	P
AC Port	L1-PE, L2-PE, L3-PE, N-PE	+ / -	0.5, 1, 2	1.2/50us	B	B	P

### Test Data (DC Power Port)

Times	5 times for positive and negative		Time interval		60s		
Test Port	Coupling Line	Polarity	Voltage (kV)	Test Waveform	Met Criteria	Required Criteria	Verdict
DC Port	P+ to P-	+ / -	0.25, 0.5	1.2/50us	B	B	P
DC Port	P+ to PE, P- to PE	+ / -	0.5, 1	1.2/50us	B	B	P

## A.9 Immunity to Conducted Disturbances Induced by RF Fields

### Test Data (AC Power Port)

Test Port	Frequency (MHz)	Test Voltage(V)	Met Criteria	Required Criteria	Verdict
AC Port	0.15 - 80	10	A	A	P

### Test Data (DC Power Port)

Test Port	Frequency (MHz)	Test Voltage(V)	Met Criteria	Required Criteria	Verdict
DC Port	0.15 - 80	10	A	A	P

## A.10 Power Frequency Magnetic Fields Immunity

Test direction	Test level(A/m)	Met Criteria	Required Criteria	Verdict
X, Y, Z	30	A	A	P


## A.11 Voltage Dips and Short Interruptions Immunity

Test Mode	Residual voltage (%)	Duration (ms)	Times	Interval (sec)	Met Criteria	Required Criteria	Verdict
Voltage Dips	0	20	3	10	B	B	P
Voltage Dips	40	200	3	10	C	C	P
Voltage Dips	70	500	3	10	C	C	P
Voltage Interruptions	0	5000	3	10	C	C	P


## ANNEX B TEST SETUP PHOTOS

### B.1 Radiated Emission

30MHz~1000MHz

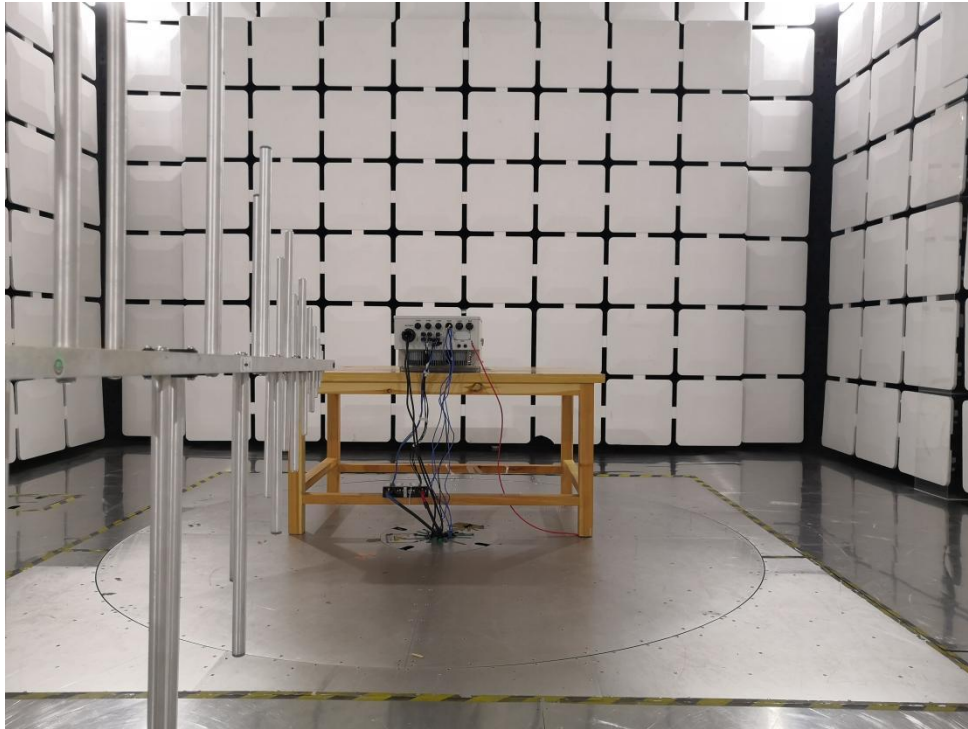


Close-up photo

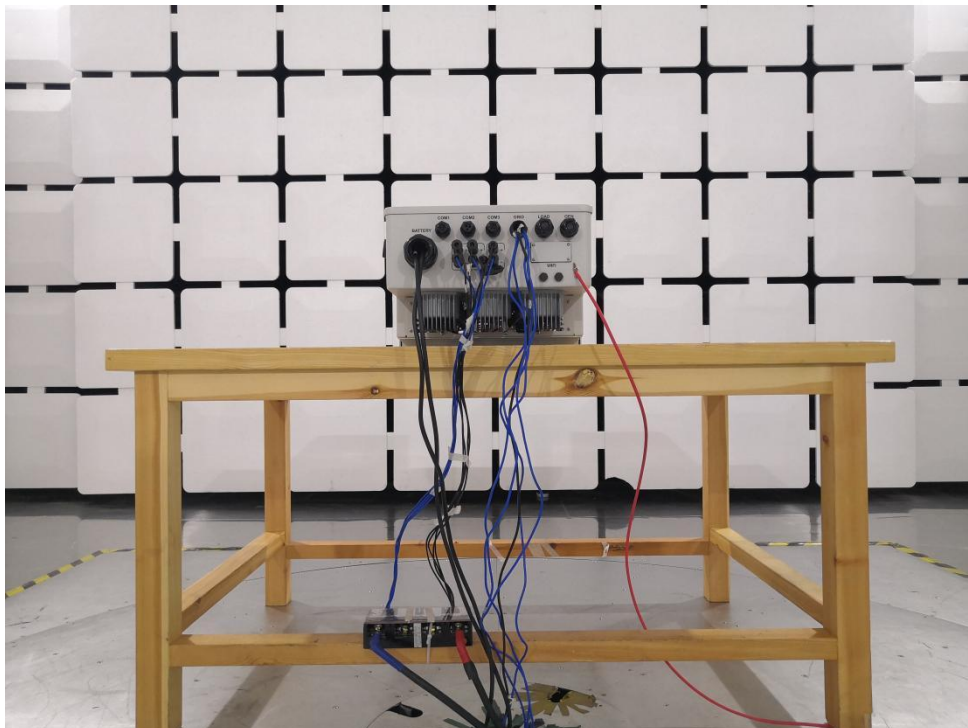



## B.2 Conducted Emission

AC Port

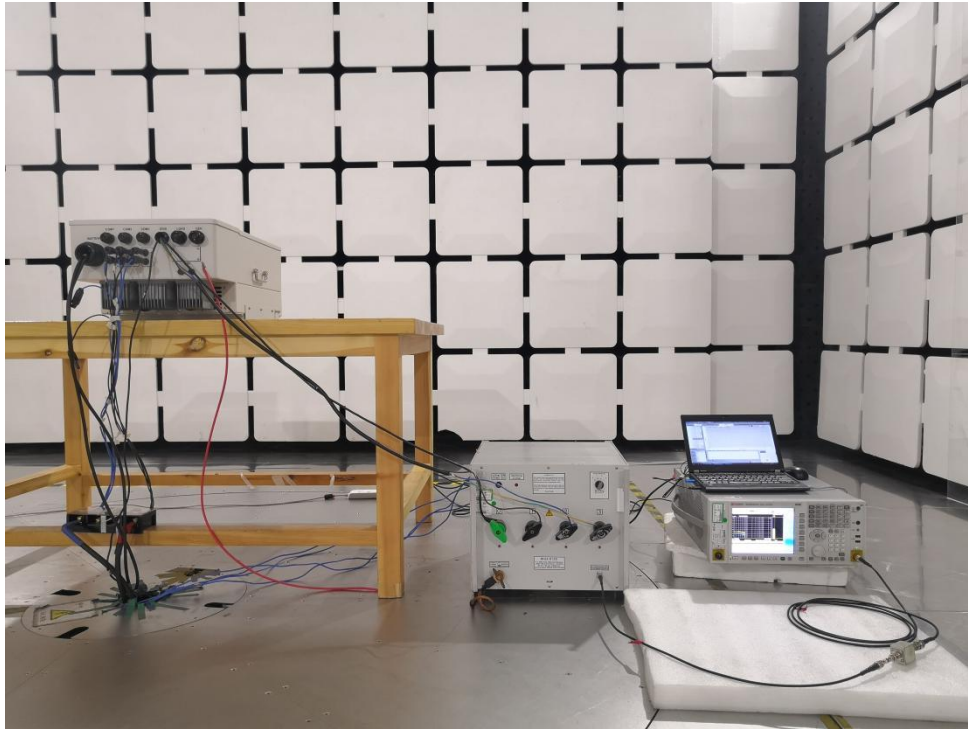

## B.3 Harmonic Current Emissions






## B.4 Voltage Fluctuations & Flicker




## B.5 Electrostatic Discharge Immunity

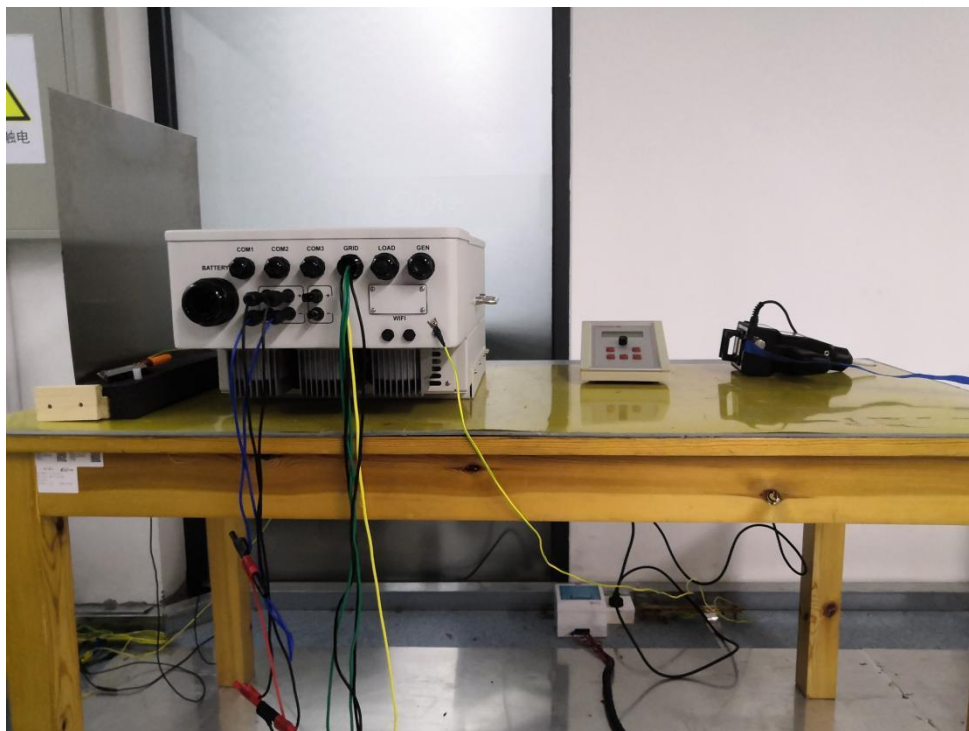


## B.6 Radio Frequency Electromagnetic Field Immunity


Below 1GHz

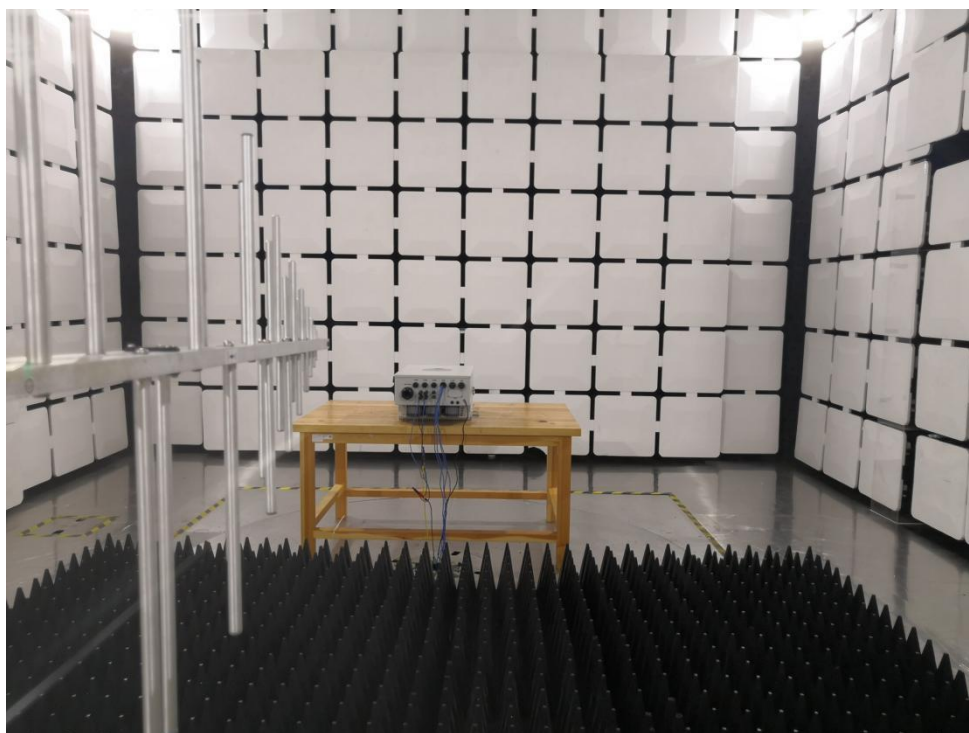

Above 1GHz

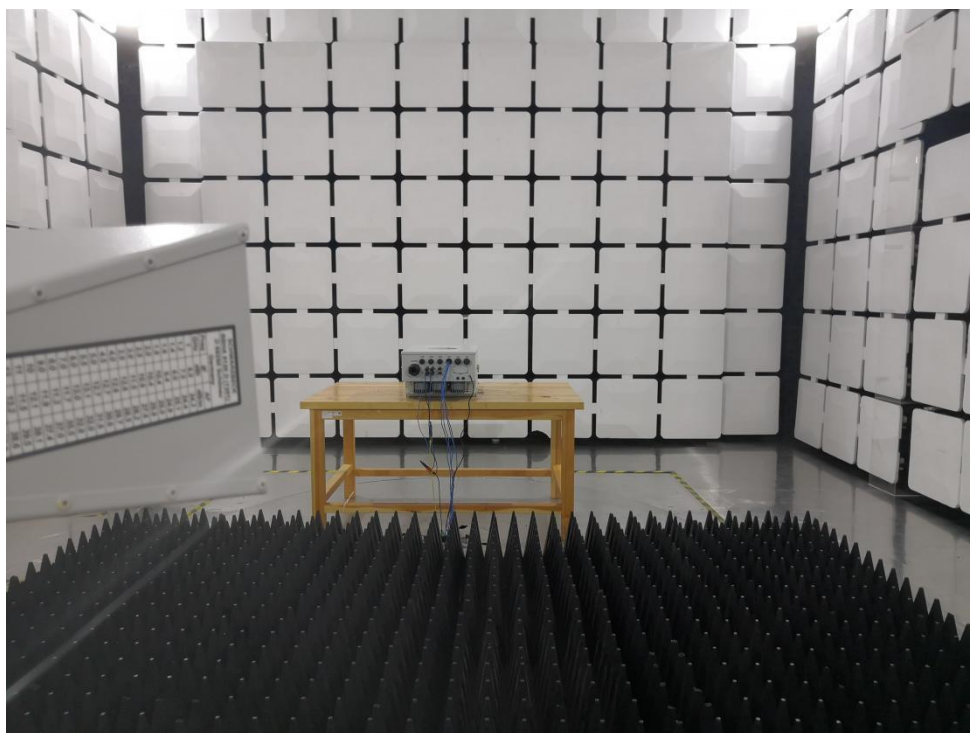


Close-up photo

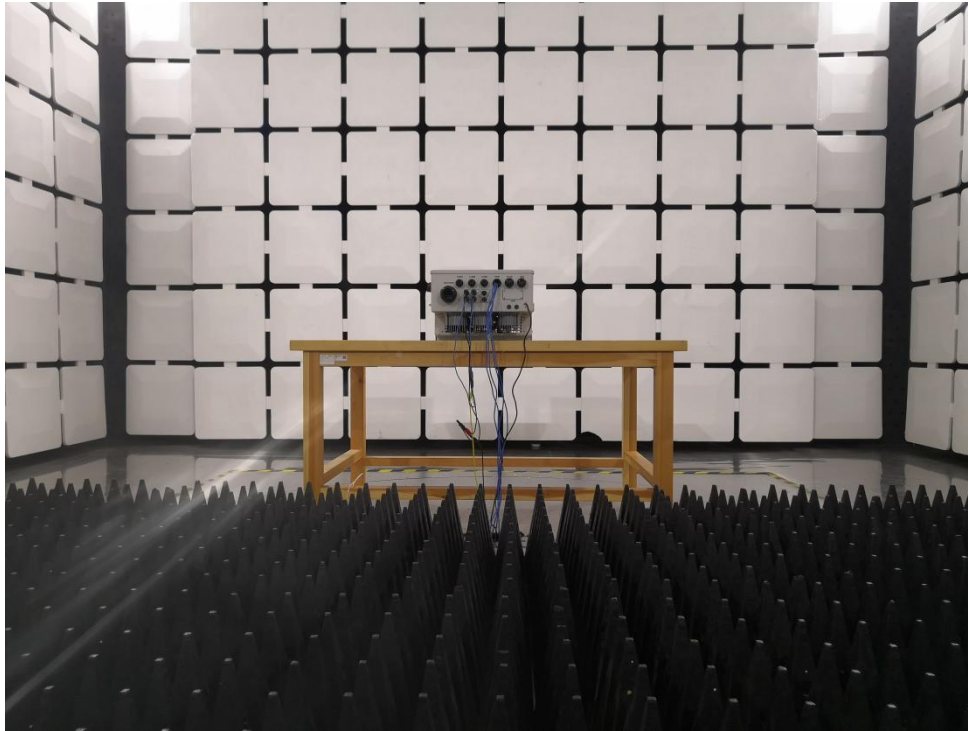


## B.7 Electrical Fast Transient/Burst Immunity

AC Port

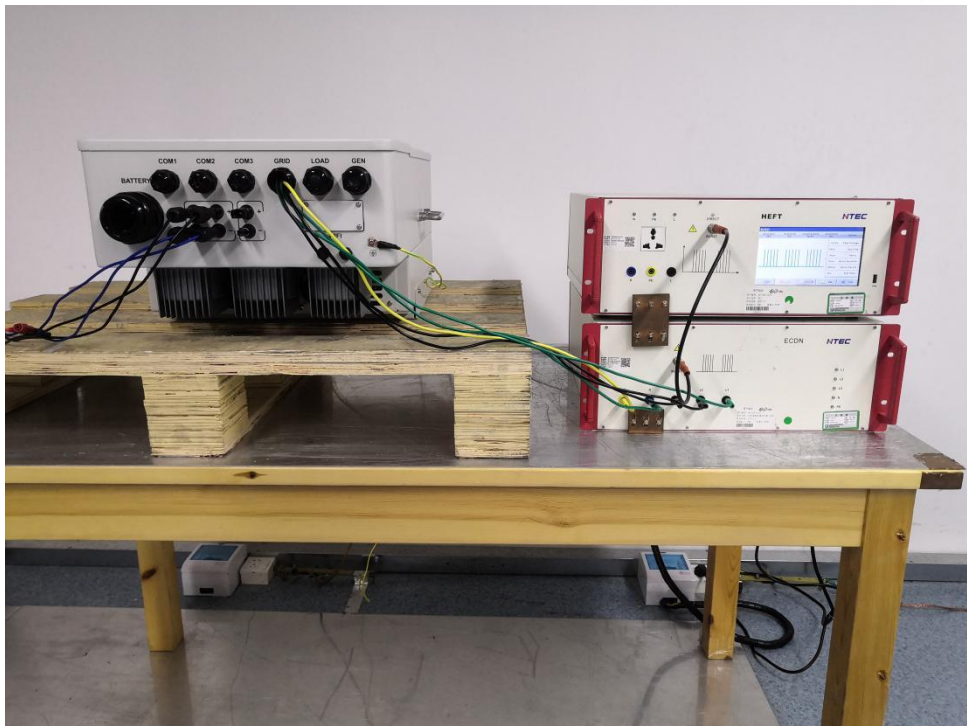




DC Port

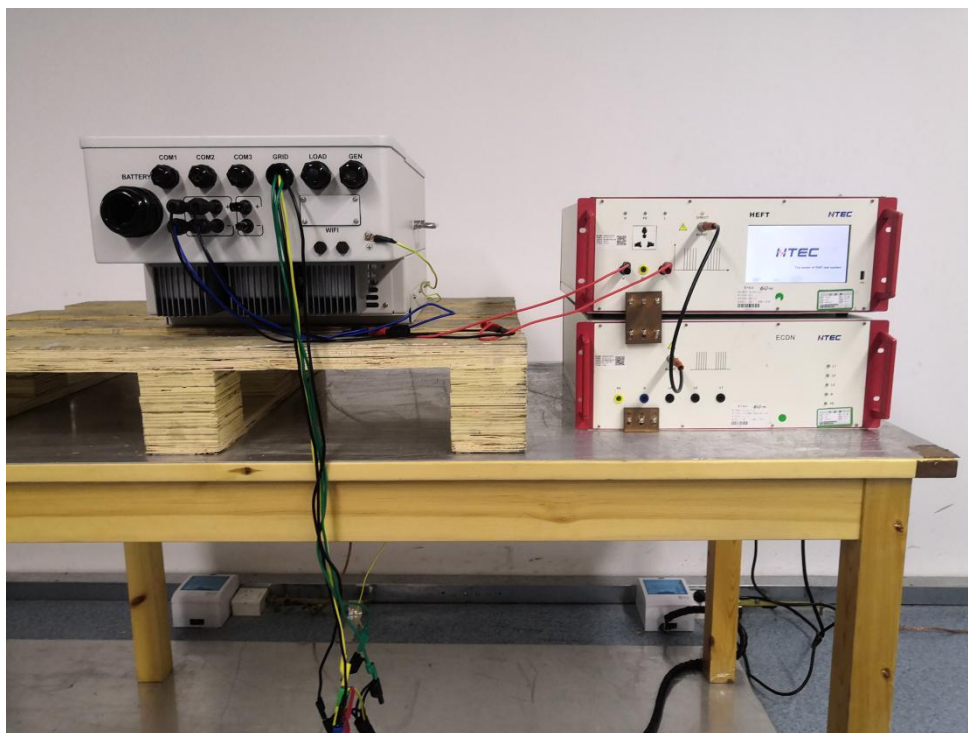

## B.8 Surge Immunity

AC Port

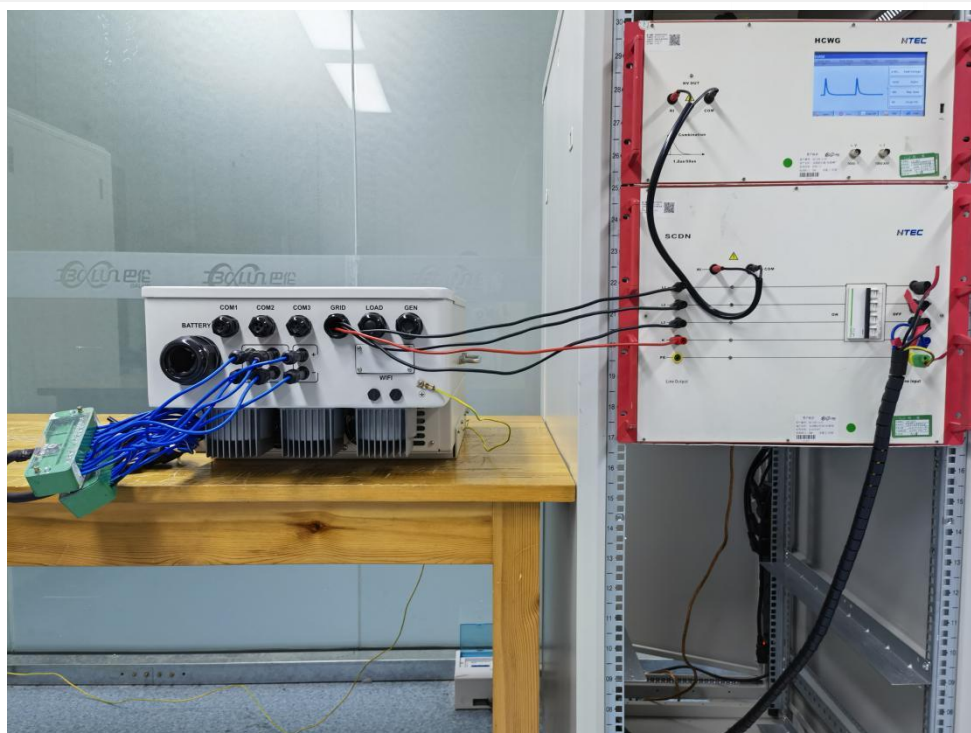


DC Port




## B.9 Immunity to Conducted Disturbances Induced by RF Fields


AC Port

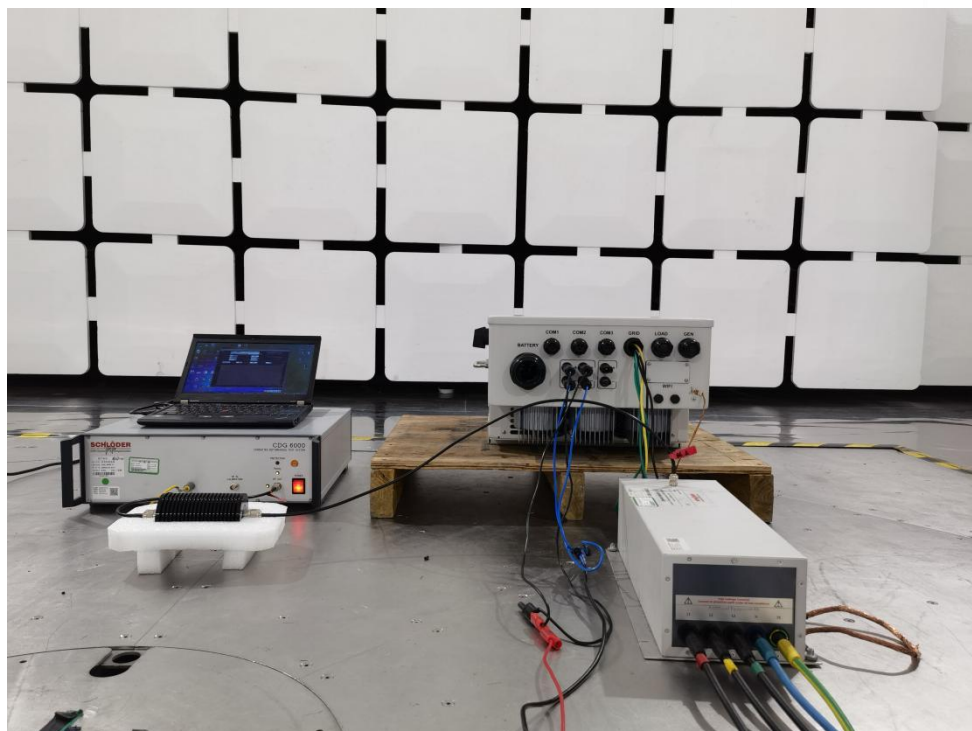

DC Port

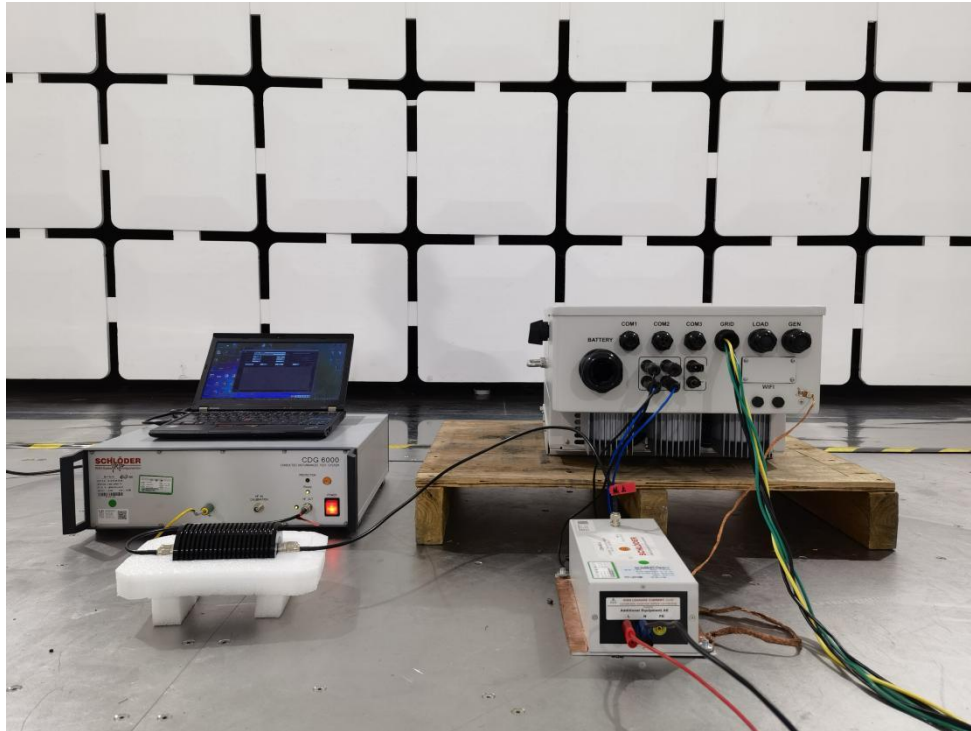

## B.10 Power Frequency Magnetic Fields Immunity

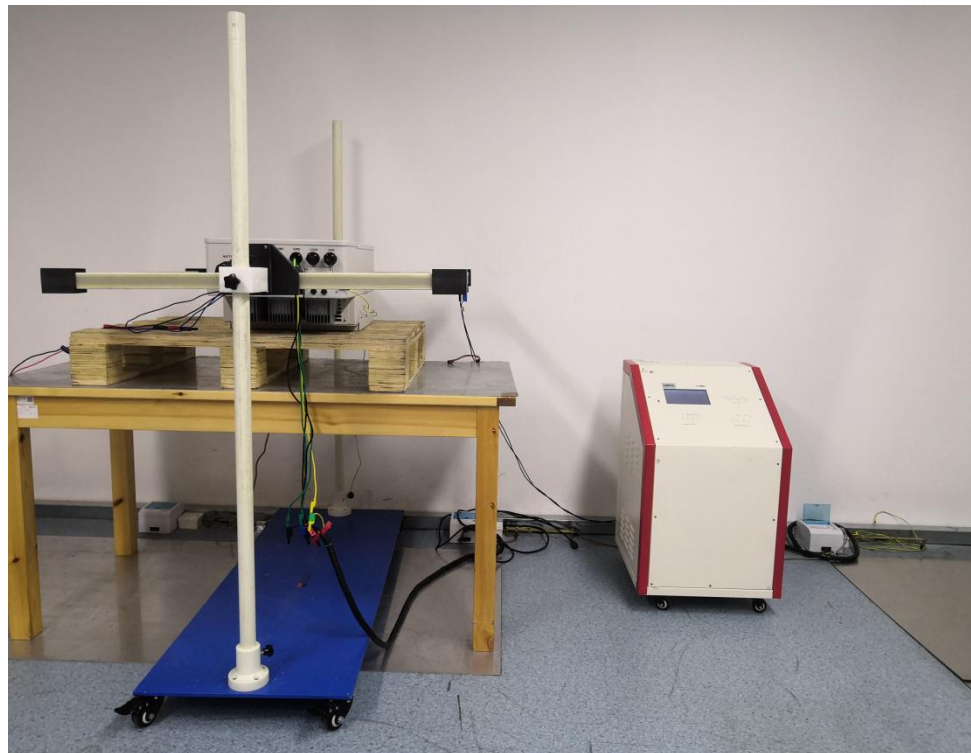



## B.11 Voltage Dips and Short Interruptions Immunity




## ANNEX C EUT EXTERNAL PHOTOS

Front



Back

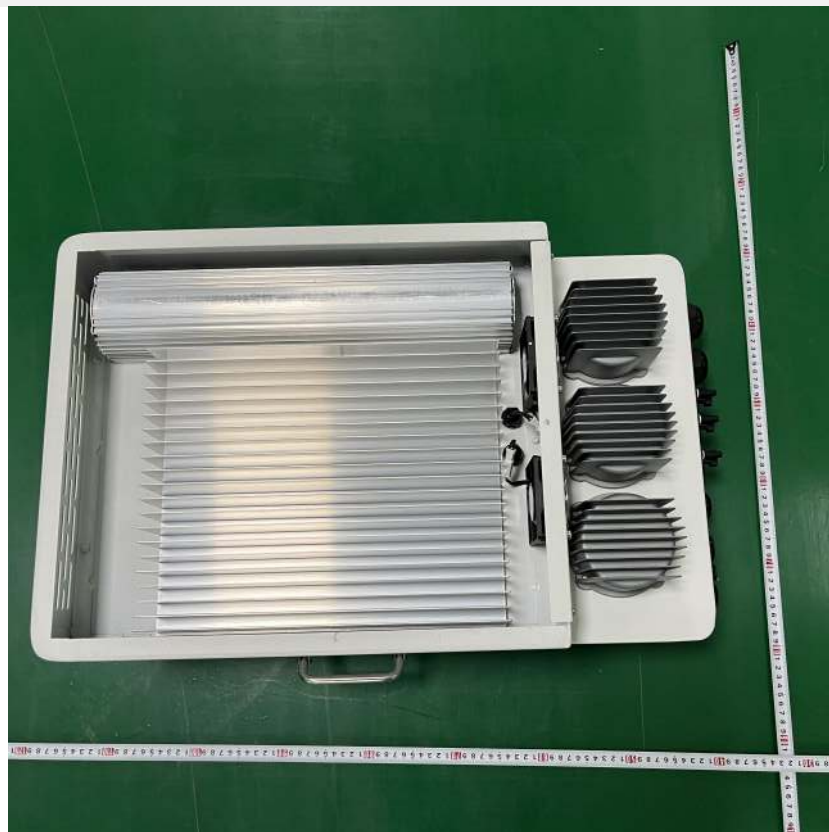



Left



Right



Top




Connection interface




## ANNEX D EUT INTERNAL PHOTOS

Internal

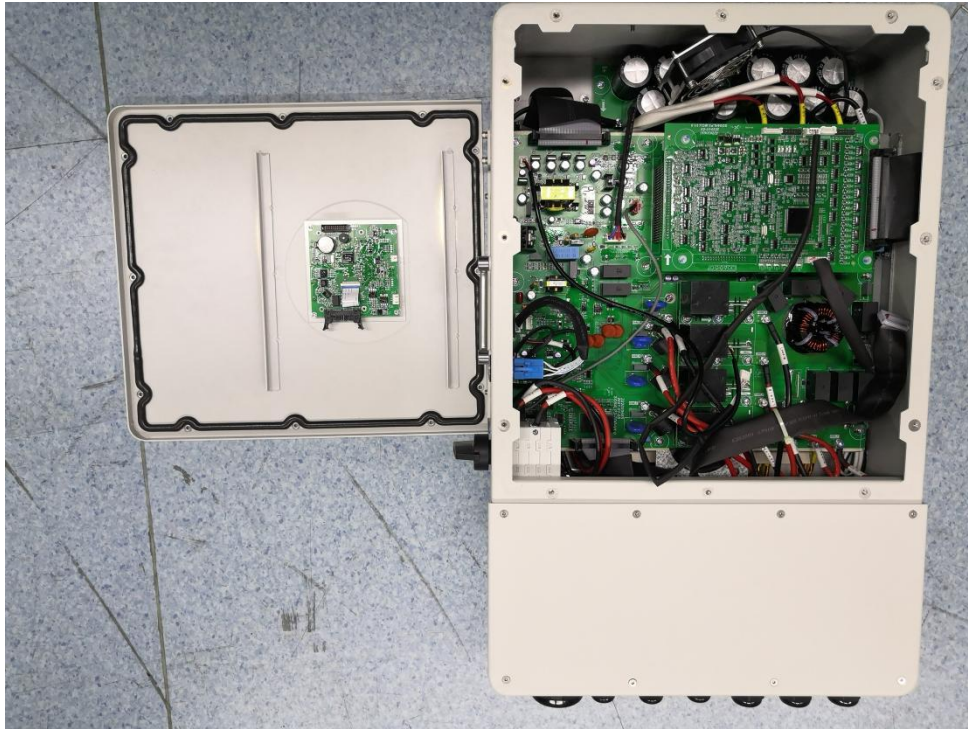


Internal

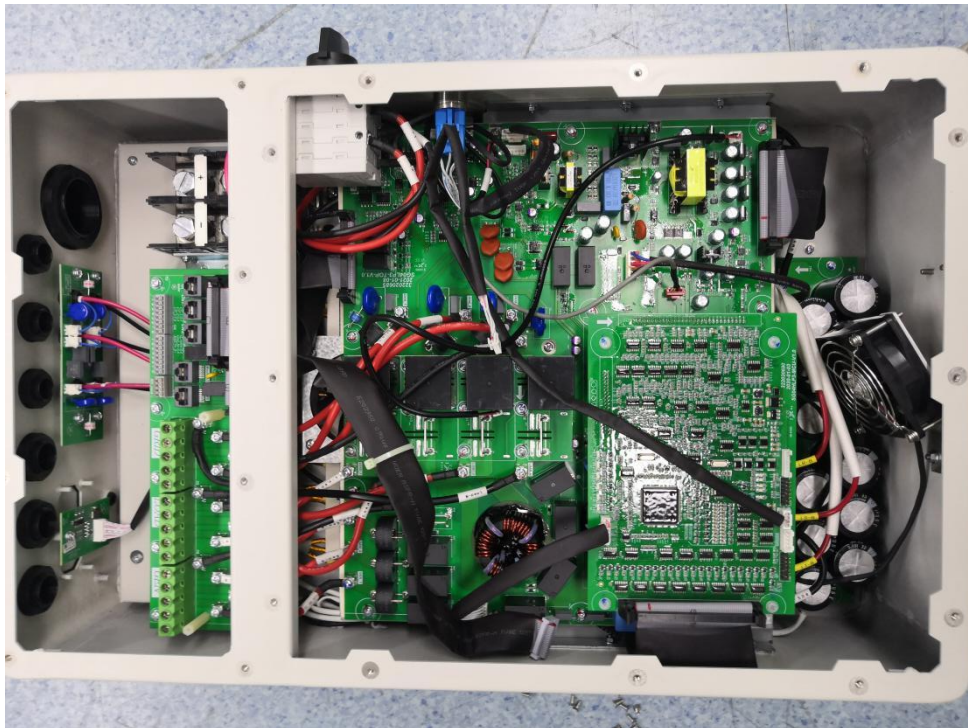




Internal

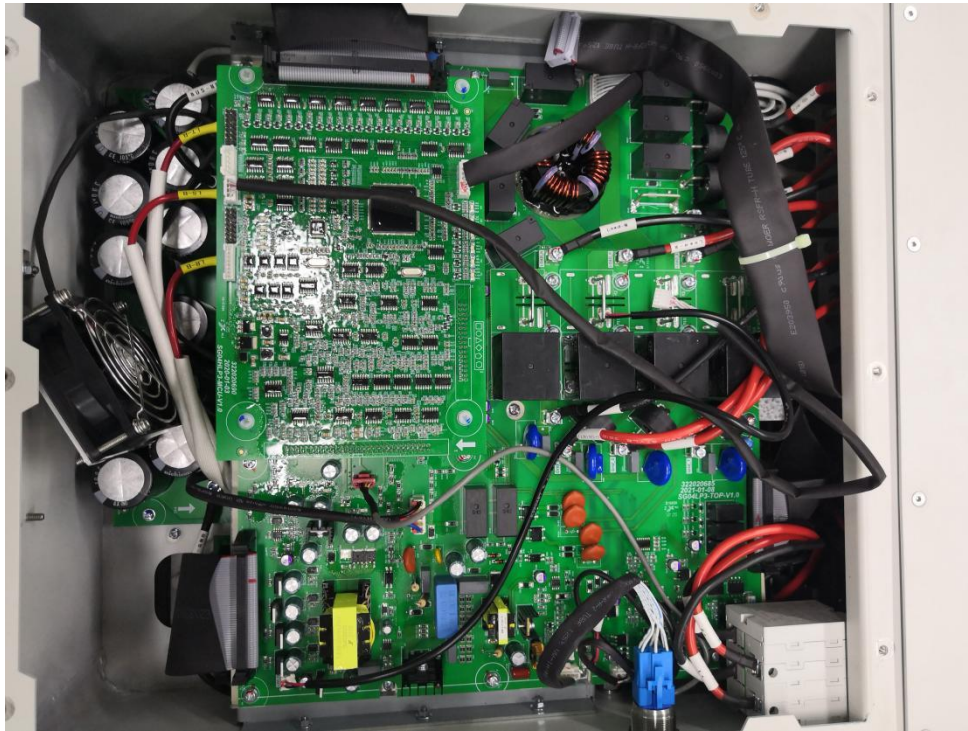


Internal



The front of main board

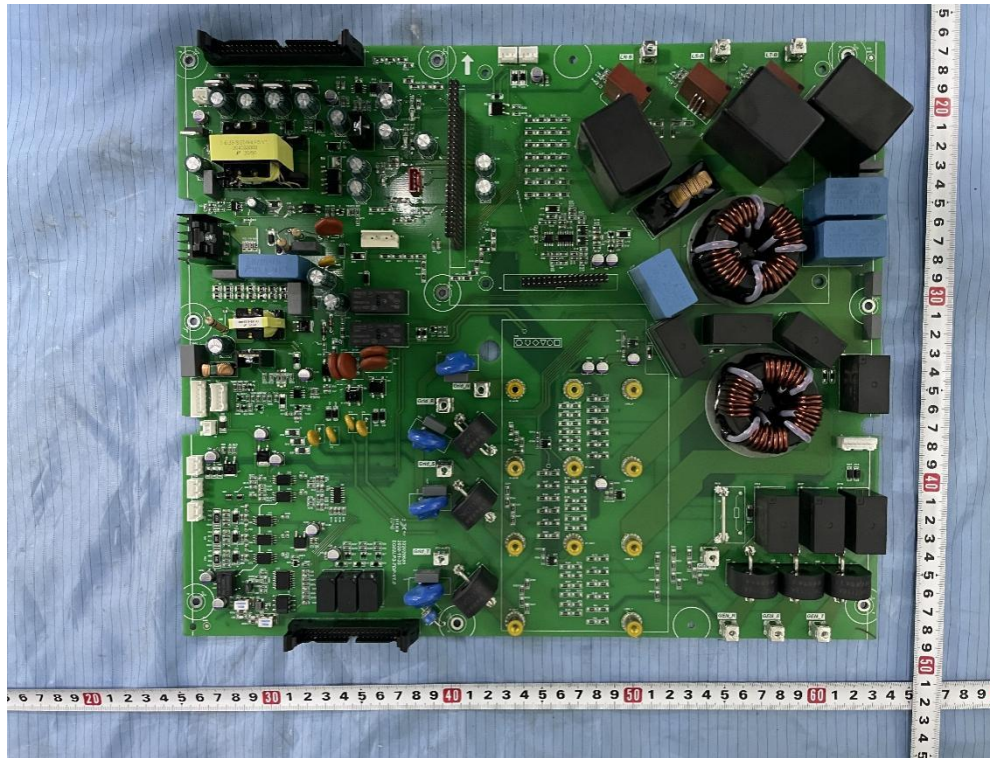


The back of main board

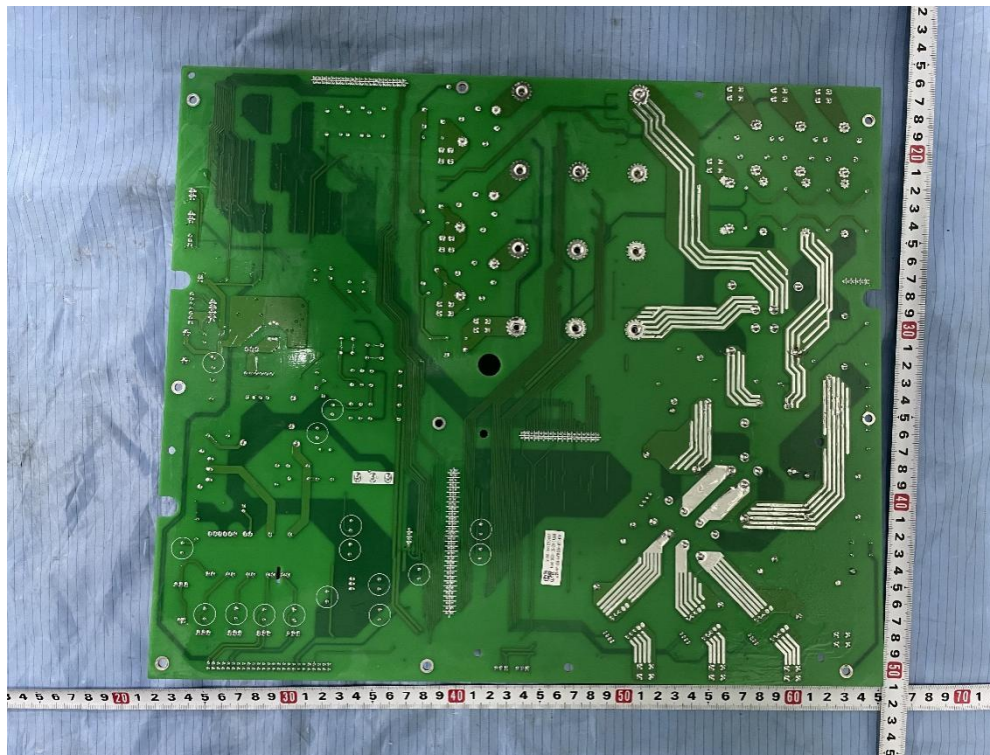




The front of drive board

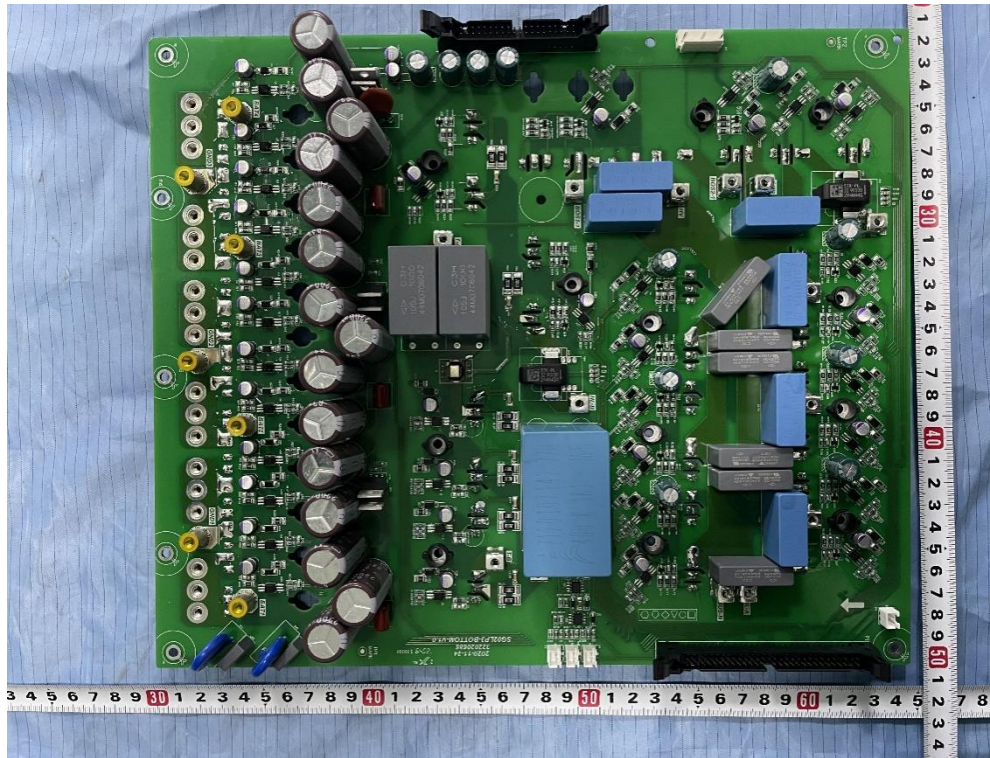


The back of drive board

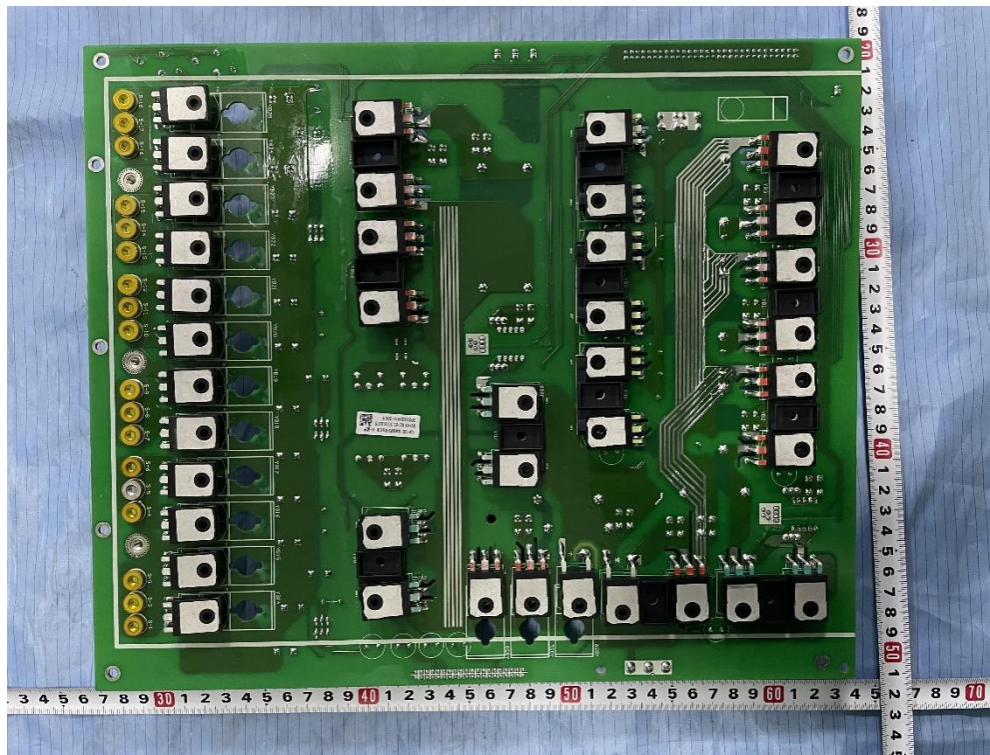




The front of relay board

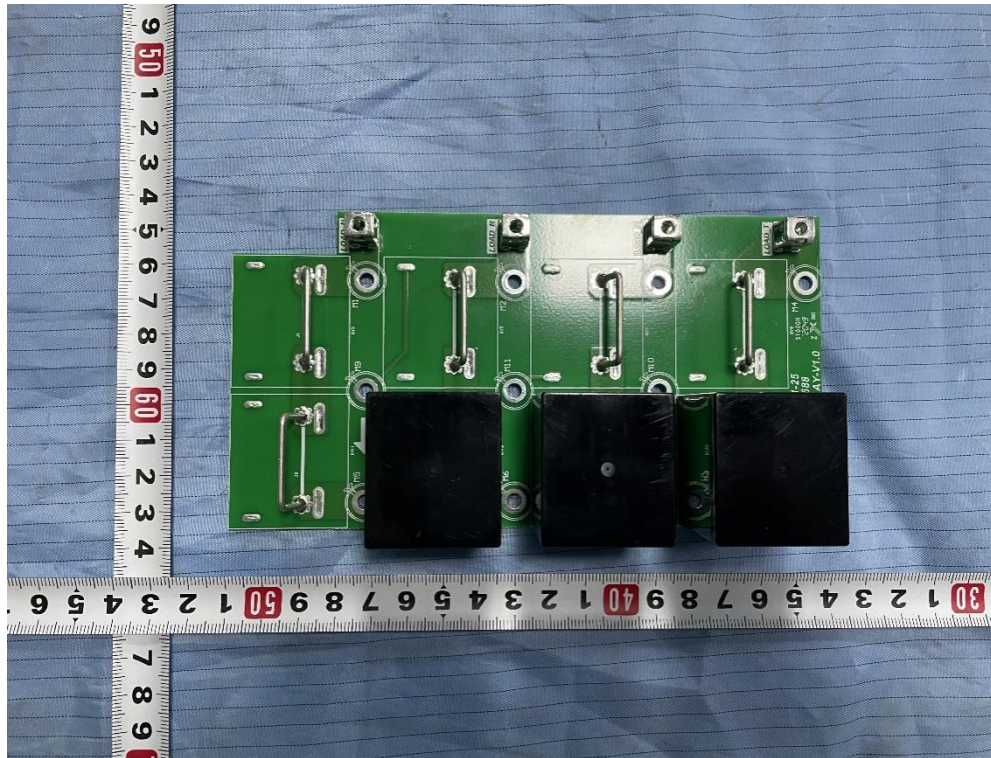


The back of relay board

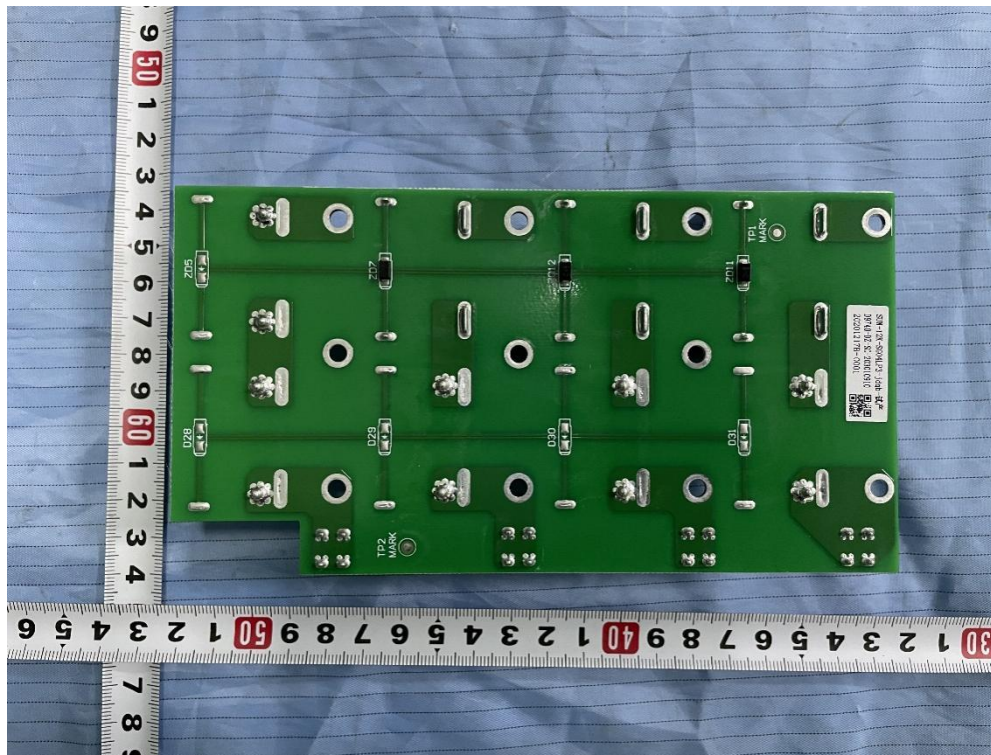




The front of EMC board

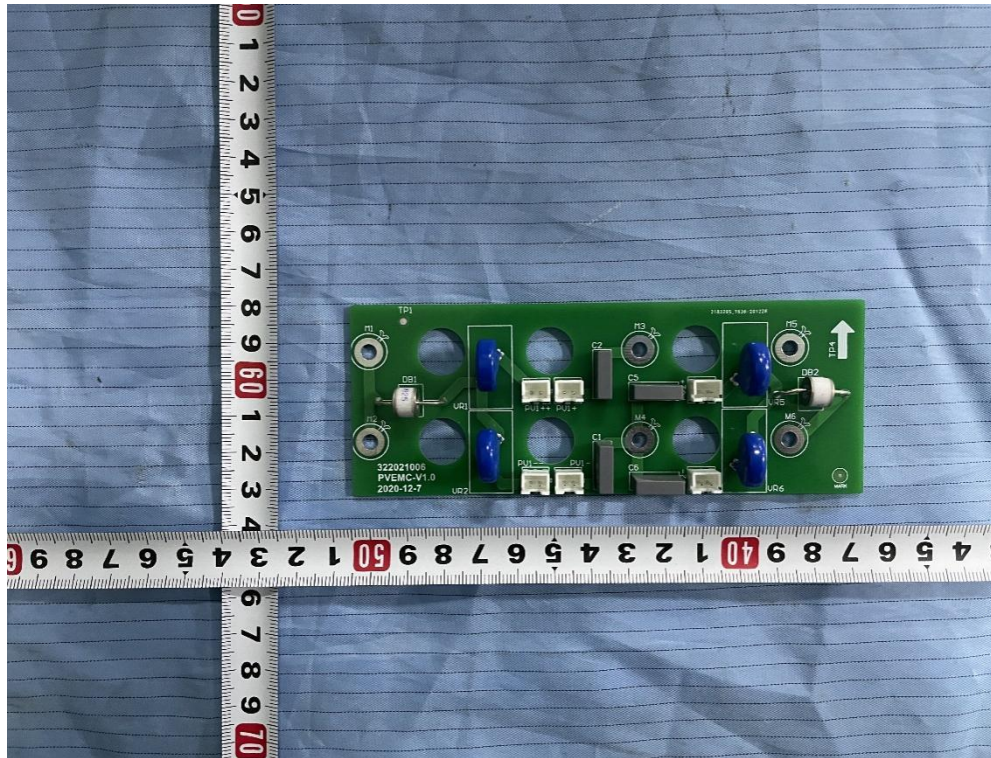


The back of EMC board

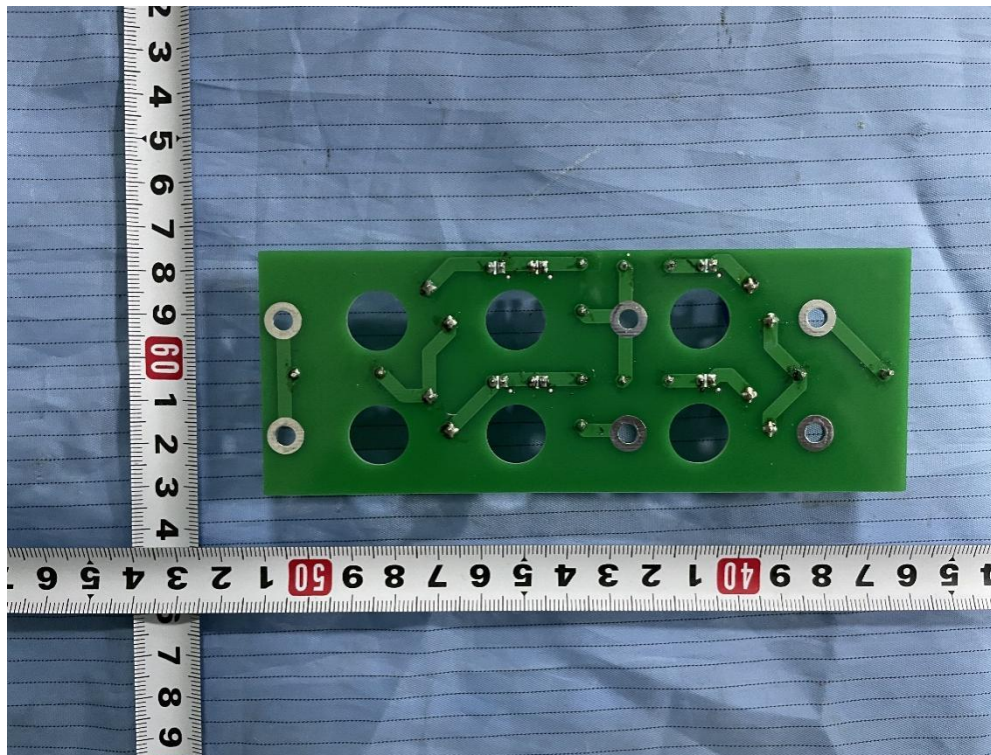



The front of control board PCB

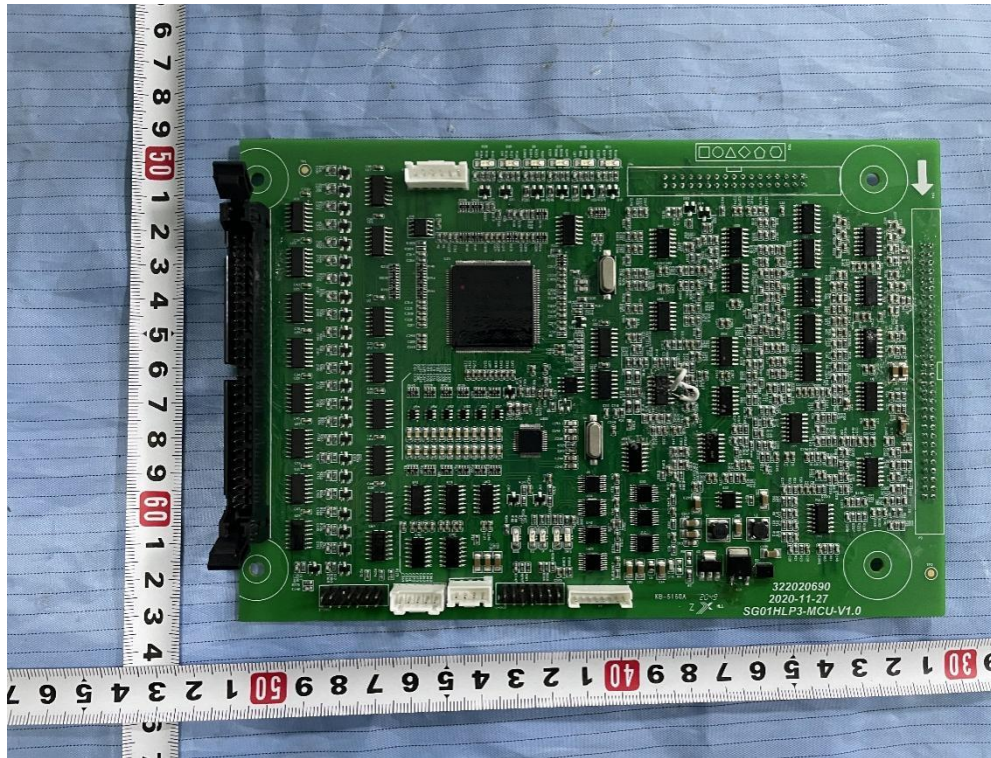


The back of control board PCB






The front of LCD board

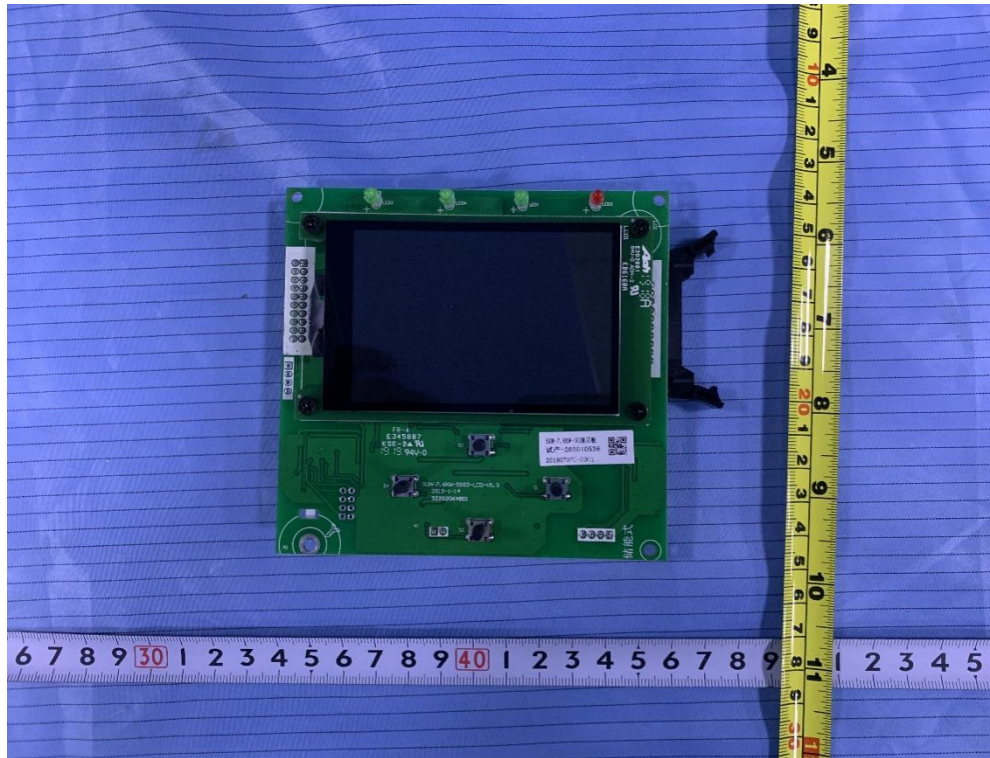


The back of LCD board

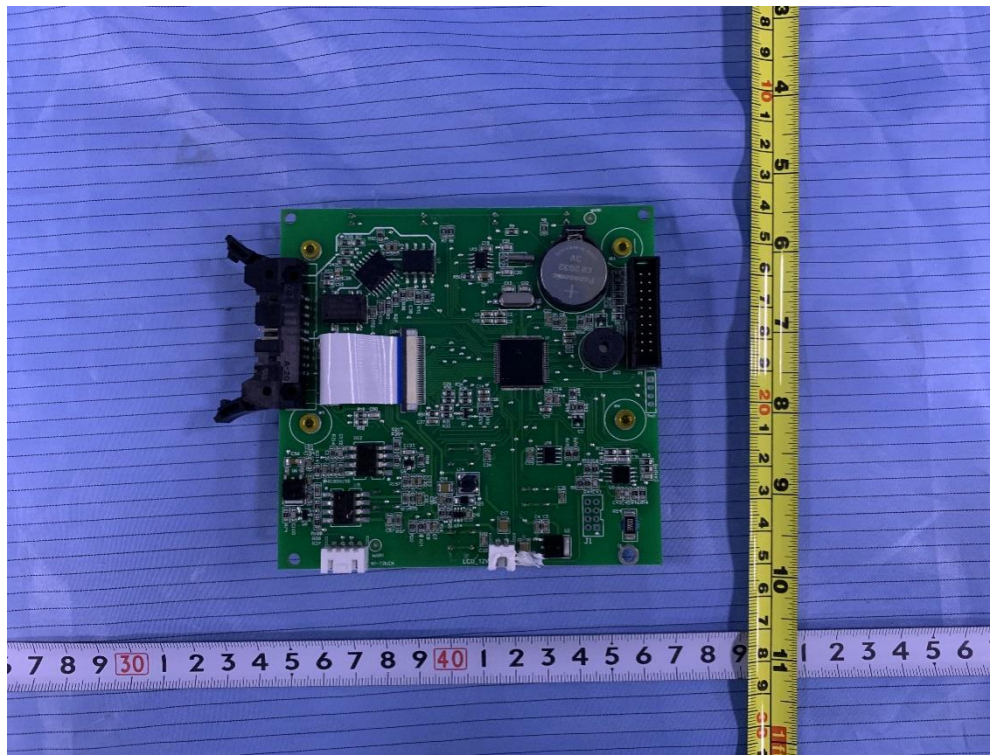




The front of PV board

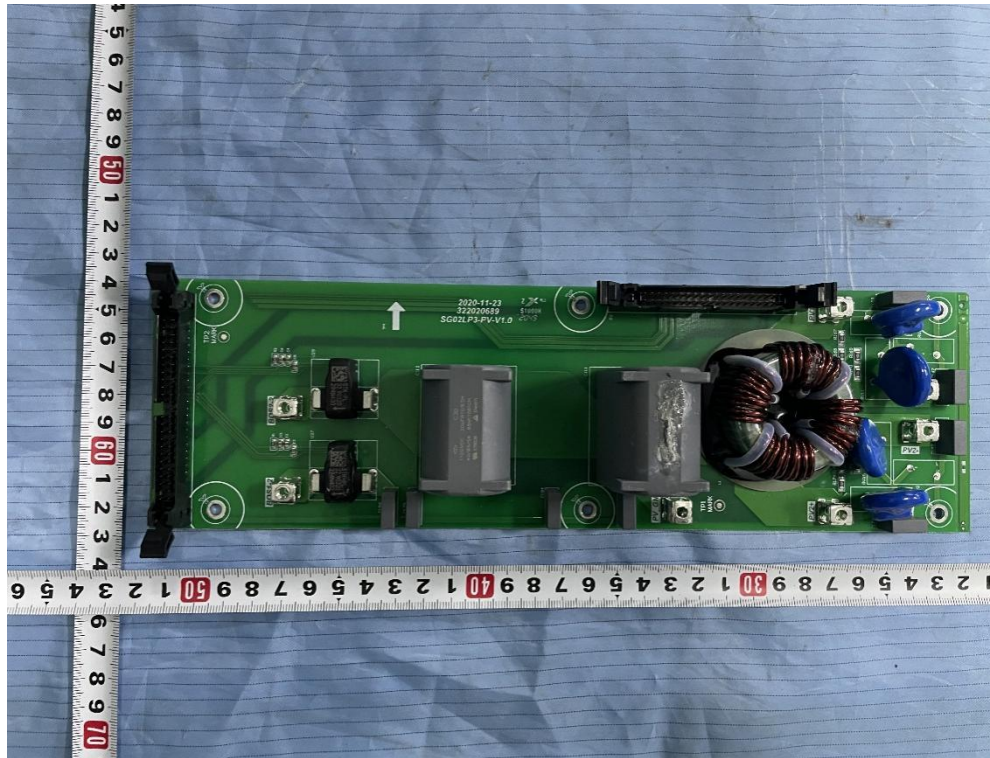

The back of PV board

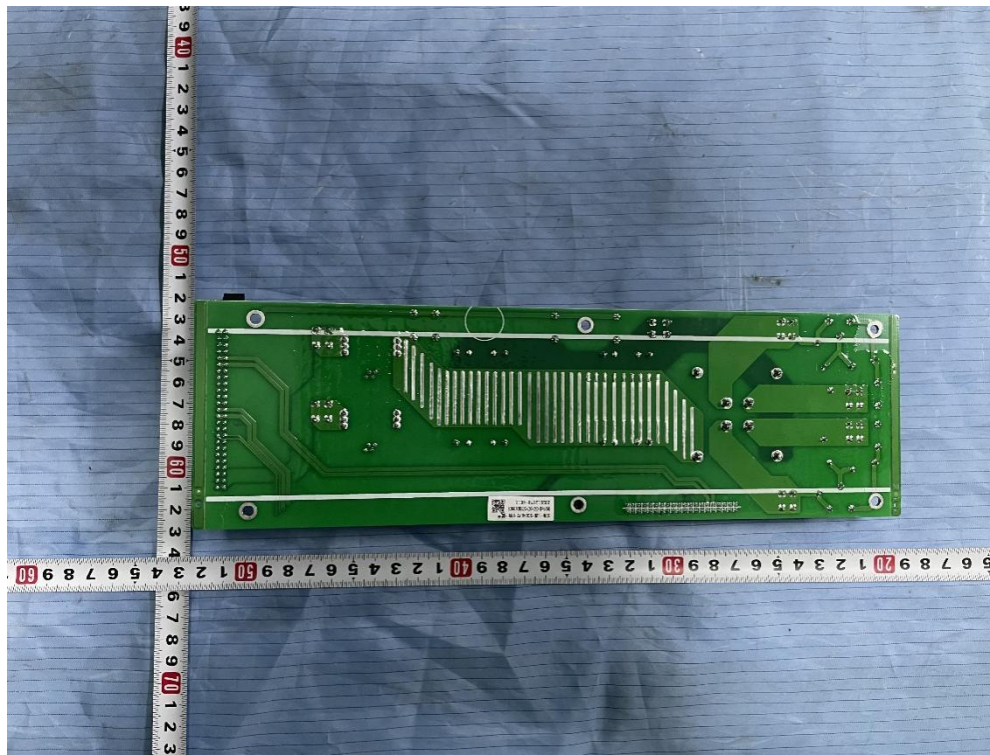





The front of capacitance board



The back of capacitance board

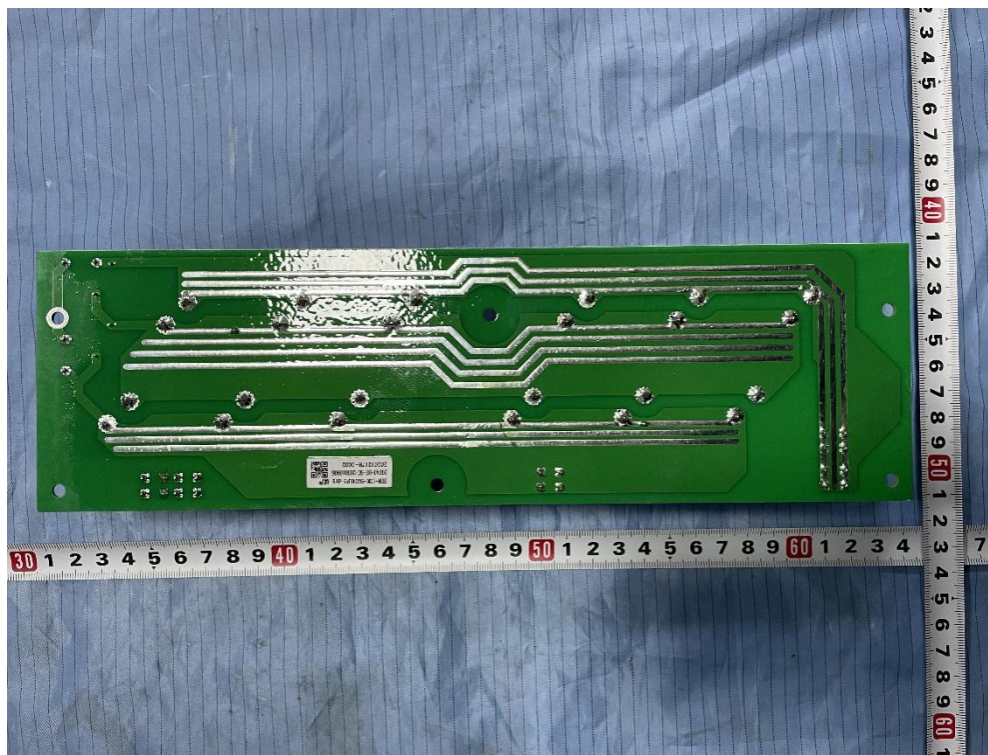

## Software Version and Serial Number

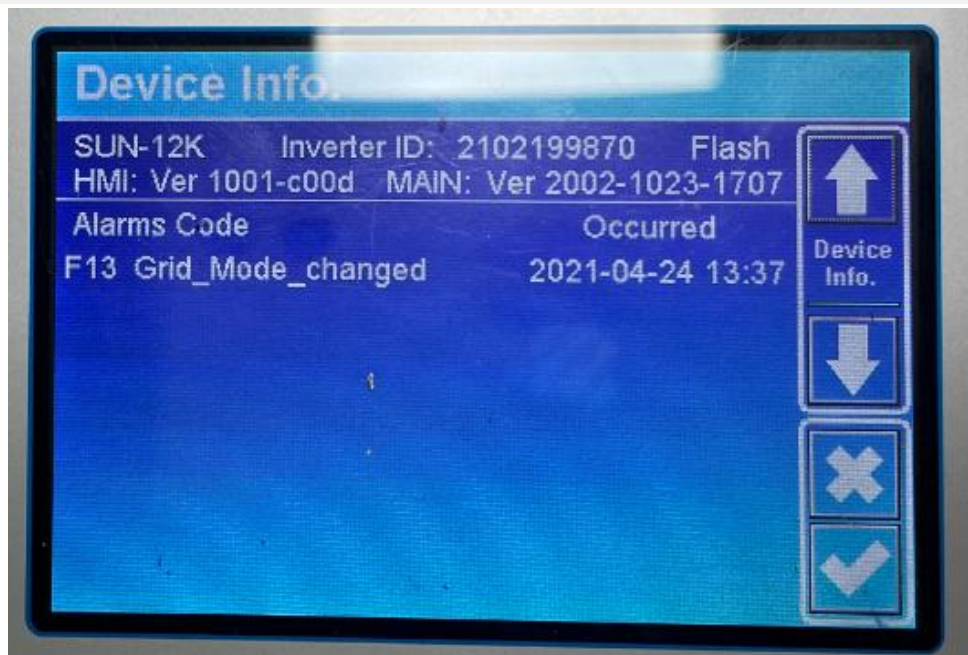

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

**--- End of test report---**