



## EZ1 series Wi-Fi Version for DIY

- One microinverter connects to two modules
- Max output power reaching 600/799VA
- Two input channels with independent MPPT
- High Input current to adapter to large modules
- Maximum reliability, IP67
- Built in Wi-Fi and Bluetooth
- Safety protection relay integrated
- Dedicated for balcony and DIY systems


### PRODUCT FEATURES

The Wi-Fi version of EZ1 series are APsystems 3<sup>rd</sup> generation of dual microinverters, they are dedicated designed for balcony and DIY systems, EZ1 series micorinverters have 2 input channels with independent MPPT and high input current and output power to adapt to today's larger power module.

Users could directly connect to the EZ1 series with their cell phones through Bluetooth and get the real-time data of the solar systems. Besides direct connection, EZ1 series could also connect to a router through Wi-Fi and send data to cloud servers for remote monitoring.

Through an AC extension cable provided by APsystems, EZ1 series could be plugged into a socket and start output energy, truly easy and convenient grid connection.

### EZ1 series Application Figure

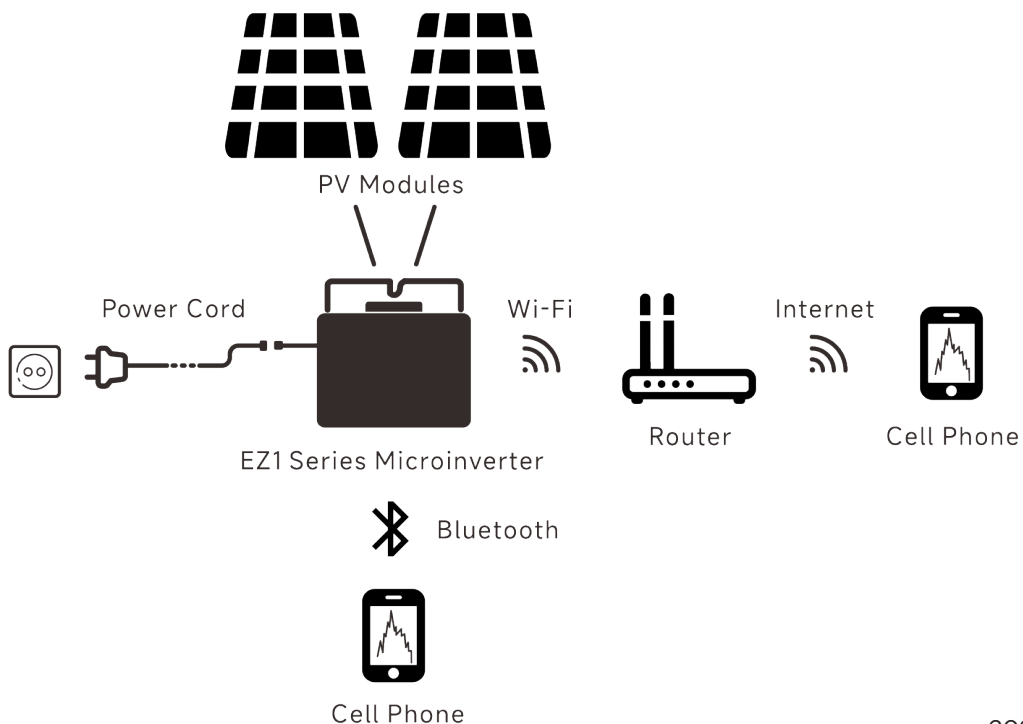

# Datasheet | EZ1 Microinverter Series

<b>Model</b>	EZ1-S	EZ1-M
<b>Region</b>	EMEA	

## Input Data (DC)

Recommended PV Module Power (STC) Range	255Wp-550Wp+	300Wp-730Wp+
Peak Power Tracking Voltage	28V-45V	
Operating Voltage Range	16V-60V	
Maximum Input Voltage	60V	
Maximum Input Current	18A x 2	20A x 2
Isc PV	22.5A x 2	25A x 2

## Output Data (AC)

Maximum Continuous Output Power	600VA	600VA <sup>(3)</sup> /799VA
Nominal Output Voltage/Range <sup>(1)</sup>	230V/184V-253V	
Nominal Output Current	2.6A	2.6A <sup>(3)</sup> /3.5A
Nominal Output Frequency/ Range <sup>(1)</sup>	50Hz/48Hz-51Hz	
Default Power Factor	0.99	

## Efficiency

Peak Efficiency	97.3%
Nominal MPPT Efficiency	99.5%
Night Power Consumption	20mW

## Mechanical Data

Operating Ambient Temperature Range <sup>(2)</sup>	- 40 °C to + 65 °C
Storage Temperature Range	- 40 °C to + 85 °C
Dimensions (W x H x D)	263mm x 218mm x 36.5mm
Weight	2.8kg
DC Connector Type	Stäubli MC4 PV-ADBP4-S2&ADSP4-S2
Cooling	Natural Convection - No Fans
Enclosure Environmental Rating	IP67

## Power Cord (Optional)

Wire Size	1.5mm <sup>2</sup>
Cable Length	5M as default
Plug Type	Schuko

## Features

Communication	Built-in Wi-Fi and Bluetooth
Maximum Units Can Be Connected <sup>(4)</sup>	2
Isolation Design	High Frequency Transformers, Galvanically Isolated
Energy Management	AP EasyPower APP
Warranty	12 Years Standard

## Compliances

Safety, EMC & Grid Compliances	EN 62109-1/-2; EN 61000-1/-2/-3/-4; EN 50549-1; DIN V VDE V 0126-1-1; VFR; UTE C15-712-1; CEI 0-21; UNE 217002; NTS; RD647; VDE-AR-N 4105
--------------------------------	---

(1) Nominal voltage/frequency range can be extended beyond nominal if required by the utility.

(2) The inverter may enter to power de-grade mode under poor ventilation and heat dissipation installation environment.

(3) The factory setting could be 600VA as default and raise to 800VA after intallation according to the regulation adjustment.

(4) For some countries it is limited to 1 because of the regulations.

© All Rights Reserved  
Specifications subject to change without notice please ensure you are using the most recent update found at web : [emea.APsystems.com](http://emea.APsystems.com)

## European offices

### APsystems

Karspeldreef 8, 1101 CJ, Amsterdam, The Netherlands  
Email : [emea@apsystems.com](mailto:emea@apsystems.com)

### APsystems

22 Avenue Lionel Terray 69330 Jonage France  
Email : [emea@apsystems.com](mailto:emea@apsystems.com)