

108cells Monocrystalline Bifacial Dual Glass Module



APEX-108HBD 395-420M10

21.51%

Maximum Module Efficiency

420W

Maximum Power Output

Power Tolerance:0-3W

1724x1134x30mm

Module Dimensions

IEC 61215 / IEC 61730

Fire safety class:Class C according to UL790


ISO 9001 :Quality Management System

ISO 14001 :Environment Management



Industry Leading Linear Power Warranty

25-year Warranty for Materials and Processing, 30-year Warranty for Extra Linear Power Output

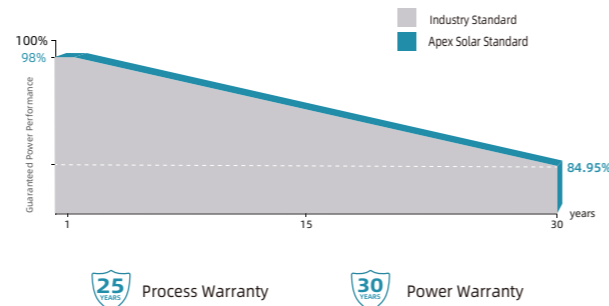

High Efficiency Half-cells Solar Panel APEX-108HBD 395-420M10

ELECTRICAL PARAMETERS AT STC

Rated Maximum Power(Pmax) [W]	395	400	405	410	415	420
Maximum Power Voltage(Vmp) [V]	30.84	31.02	31.23	31.45	31.64	31.82
Maximum Power Current(Imp) [A]	12.81	12.90	12.97	13.04	13.12	13.20
Open Circuit Voltage(Voc) [V]	36.98	37.07	37.19	37.32	37.45	37.58
Short Circuit Current(Isc) [A]	13.70	13.79	13.87	13.95	14.02	14.10
Module Efficiency [%]	20.23	20.48	20.74	21.00	21.25	21.51

STC: Irradiance 1000 W/m2 module temperature 25°C AM=1.5

ELECTRICAL PARAMETERS AT NMOT

Rated Maximum Power(Pmax)[W]	298	302	306	310	314	318
Maximum Power Voltage(Vmp) [V]	34.75	34.88	35.12	35.23	35.37	35.50
Maximum Power Current(Imp) [A]	29.08	29.26	29.47	29.72	29.89	30.09
Open Circuit Voltage(Voc) [V]	10.96	11.03	11.10	11.16	11.22	11.29
Short Circuit Current(Isc) [A]	10.25	10.32	10.38	10.43	10.50	10.57

NMOT: Irradiance 800 W/m2 ambient temperature 20°C wind speed: 1m/s

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power (Pmax) [W]	415	420	425	431	436	441
	Module Efficiency STC[%]	21.24	21.51	21.78	22.05	22.31	22.58
10%	Maximum Power (Pmax) [W]	435	440	446	451	457	462
	Module Efficiency STC[%]	22.25	22.53	22.81	23.10	23.38	23.66
20%	Maximum Power (Pmax) [W]	474	480	486	492	498	504
	Module Efficiency STC[%]	24.27	24.58	24.89	25.20	25.50	25.81

MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	182x182mm
Cell Arrangement	108(6x18)
Weight	21.5kg(±3%)
Module Dimensions	1724x1134x30mm
Cable	4.0 mm ² positive/negative:300mm(11.8inches),length Can be customized
Front Glass	2.0 mm (0.08 inches), High Transmission, ARCoated Heat Strengthened Glass
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	Anodized aluminium alloy
Junction Box	Protection class IP68
Connector	Mc4 Compatible
Mechanical Load	Front side 5400Pa/Rear side 2400Pa



OPERATING CONDITIONS

Maximum System Voltage (V)	1000/1500VDC (IEC)
Pmax Temperature Coefficient	-0.34%/°C
Voc Temperature Coefficient	-0.28%/°C
ISC Temperature Coefficient	+0.05%/°C
Nominal Operating Cell Temperature	45±2°C
Operating Temperature	- 40°C-+85°C
Maximum Series Fuse	25A


PACKING CONFIGURATION

Quantity/Pallet	36pcs/pallet
Quantity/Container	962pcs/40HQ

Module Dimension(mm)

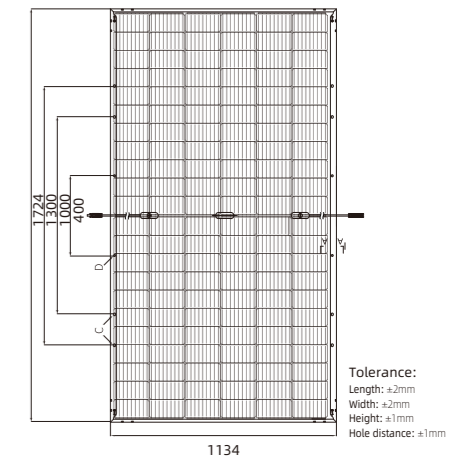

Current-Voltage Curve (420W)

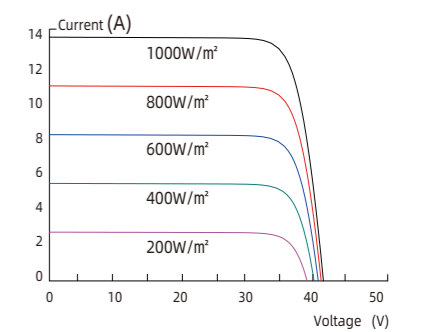

Power-Voltage Curve (420W)

